


WAAS CH <b>99414</b> <b>W08A</b>	APP CRS <b>079°</b>	Rwy Idg <b>5000</b> TDZE <b>463</b> Apt Elev <b>463</b>
--	------------------------	---

RNAV (GPS) RWY 8L

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.					MISSED APPROACH: Climb to 3000 direct DBLEE and right turn on track 171° to BNANA and right turn on track 272° to DERDF and hold.	
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using St Louis Lambert Intl altimeter setting. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase LPV DA to 912, LNAV/VNAV DA to 1132 and all MDA 60 feet, increase LPV all Cats visibility to 1½ miles.						
ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER★ 124.75 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 133.1	ST. LOUIS CLNC DEL 121.7 (when tower closed)	UNICOM 122.95

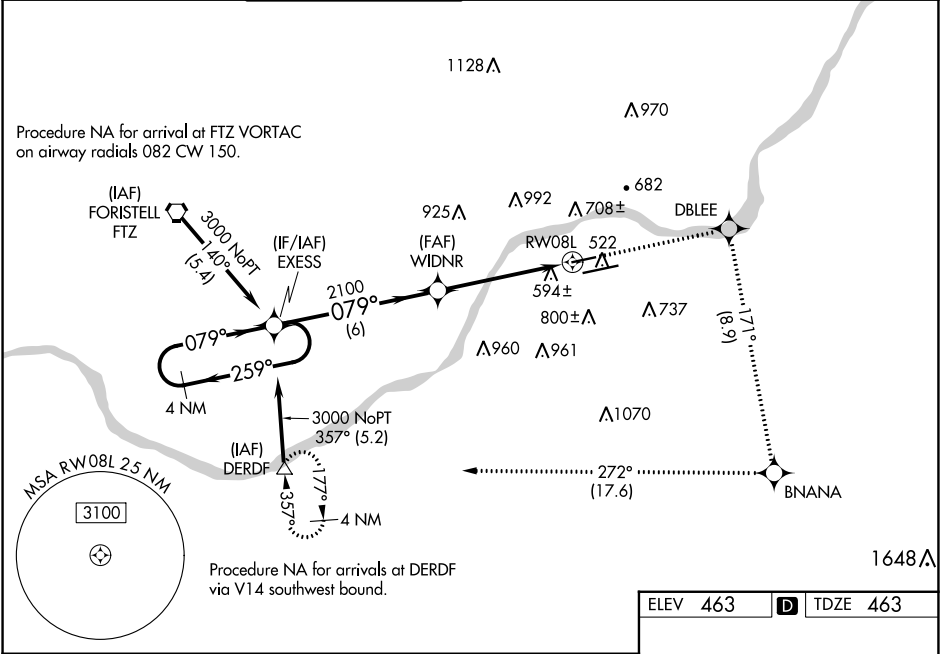

4 NM Holding Pattern		EXESS	<div><div>3000 ↑</div><div>DBLEE ✦</div><div>tr 171° ↷</div><div>BNANA ✦</div><div>tr 272° ↷</div><div>DERDF △</div></div>			
<div>3000 ← 259° 079° →</div>		WIDNR	<div><div>2100</div><div>* 1.7 NM to RW08L</div><div>RW08L</div><div>* LNAV only</div></div>			
GP 3.00° TCH 41		<div><div>6 NM</div><div>3.3 NM</div><div>1.7 NM</div></div>				
CATEGORY	A	B	C	D		
LPV DA	855-1⅓	392 (400-1⅓)	NA			
LNAV/ VNAV DA	1075-2½	612 (700-2½)	NA			
LNAV MDA	1040-1	577 (600-1)	NA			
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	NA			

