



WAAS CH 86607 W35A	APP CRS 353°	Rwy Idg TDZE Apt Elev	5500 1946 1953
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35
PRATT RGNL (P'TT)

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Great Bend altimeter setting: Increase LPV DA to 2295 feet and all visibilities ¼ SM; Increase LNAV/VNAV DA to 2421 feet and all visibilities ½ SM; Increase all MDAs 100 feet and visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using Great Bend altimeter setting.

MISSED APPROACH: Climb to 4300 direct ORLIE and hold.

AWOS-3PT 118.725	KANSAS CITY CENTER 118.8 322.425	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

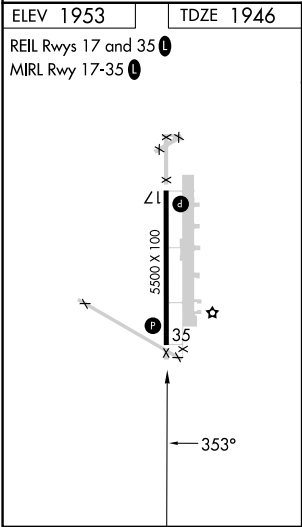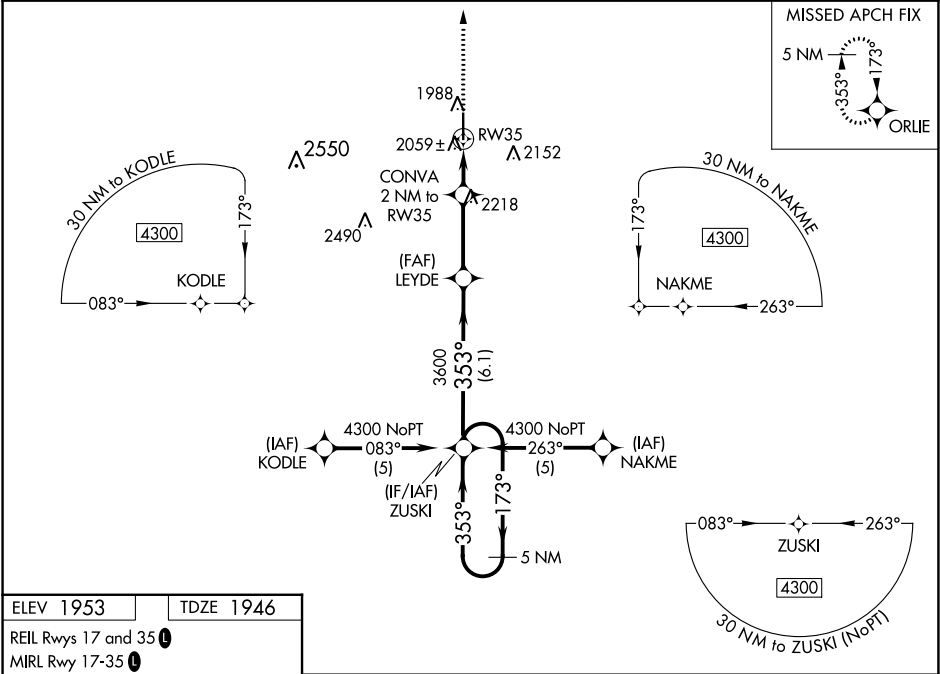

4300	ORLIE	CONVA 2 NM to RW35	LEYDE	ZUSKI	5 NM Holding Pattern	4300
*LNAV only.		*1.1 NM to RW35				
		2620*	3600			GP 3.00° TCH 40
1.1 NM	0.9 NM	3 NM	6.1 NM			
CATEGORY	A	B	C	D		
LPV DA	2196-1	250 (300-1)		NA		
LNAV/VNAV DA	2322-1¼	376 (400-1¼)		NA		
LNAV MDA	2320-1	374 (400-1)		NA		
CIRCLING	2380-1 427 (500-1)	2420-1 467 (500-1)	2580-1¾ 627 (700-1¾)	NA		

NC-2, 13 JUL 2023 to 10 AUG 2023

NC-2, 13 JUL 2023 to 10 AUG 2023