

APP CRS  
**011°**

Rwy Idg **5000**  
TDZE **65**  
Apt Elev **65**

RNAV (GPS) RWY 1  
INVERNESS (INF')


▼

▲

When local altimeter setting not received, use Ocala altimeter setting and increase all MDA 60 feet; and increase LNAV Cat C visibility ¼ mile and Circling Cat C visibility ¼ mile. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Procedure NA at night.

MISSED APPROACH: Climb to 2000 direct GIOVA and on track 050° to VANNI and hold.

AWOS-3 <b>119.975</b>	JACKSONVILLE APP CON <b>118.6 251.15</b>	UNICOM <b>122.725 (CTAF) 0</b>
--------------------------	---	-----------------------------------

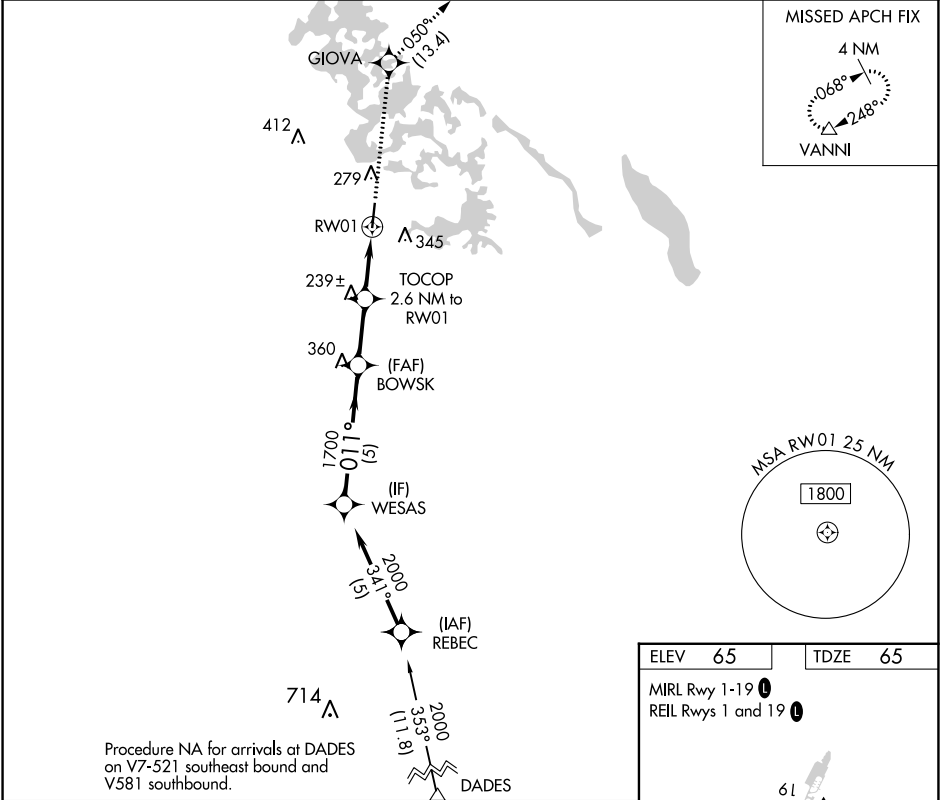

ELEV 65 | TDZE 65

MIRL Rwy 1-19 0

REIL Rwys 1 and 19 0

61

0.5% UP

5000 X 75

011° to RW01

	WESAS	2000	BOWSK	2000	GIOVA	tr 050°	VANNI
		011°	3.00° TCH 47	2.6 NM to RW01			
		1700	940				
		5 NM	2.4 NM	2.6 NM			
CATEGORY	A	B	C	D			
LNAV MDA	500-1	435 (500-1)	500-1¼ 435 (500-1¼)	NA			
CIRCLING	660-1	595 (600-1)	660-1½ 595 (600-1½)	NA			

SE-3, 13 JUL 2023 to 10 AUG 2023

SE-3, 13 JUL 2023 to 10 AUG 2023