

| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 42502 W34A | APP CRS 343° | Rwy ldg TDZE Apt Elev | 4601 16 16 |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 34

EMMONAK (ENM) (PAEM)


▼

▲

If local altimeter setting not received, use St Mary's altimeter setting and increase all DAs 168 feet and MDAs 180 feet. VDP NA with St Mary's altimeter setting. DME/DME RNP- 0.3 NA. Baro-VNAV NA when using St Mary's altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (119°F).

MISSED APPROACH: Climb to 1600 direct ECKIX and left turn via 253° track to ZEDET and left turn via 149° track to OFQIM and hold.

| | | |
|--------------------------|----------------------------------|----------------------|
| AWOS-3P 135.35 | ANCHORAGE CENTER 124.5 | CTAF 122.9 |
|--------------------------|----------------------------------|----------------------|

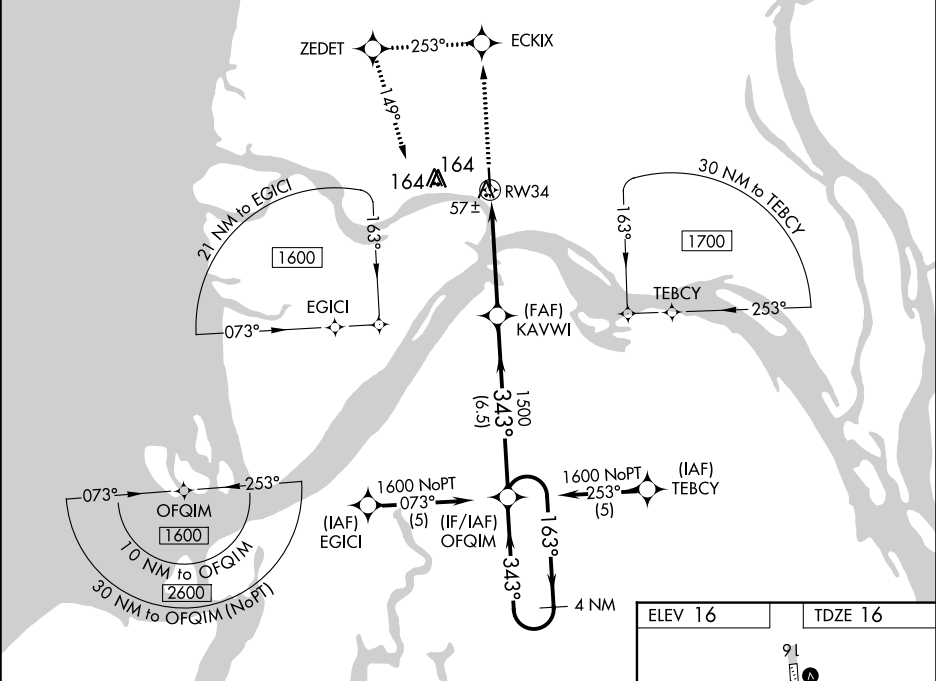

1600

ECKIX

tr 253°

ZEDET

tr 149°

OFQIM

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).

OFQIM 4 NM Holding Pattern

* LNAV only

RWY 34

KAVWI

1500

343°

163°

1600

GP 3.00° TCH 35

| CATEGORY | A | B | C | D |
|---------------|-------|-------------|------------------------|----------------------|
| LPV DA | | 266-1 | 250 (300-1) | |
| LNAV/ VNAV DA | | 320-1 | 304 (400-1) | |
| LNAV MDA | | 320-1 | 304 (400-1) | |
| CIRCLING | 520-1 | 504 (600-1) | 520-1½ 504 (600-1½) | 580-2 564 (600-2) |

