

WAAS CH 42508 W30A	APP CRS 295°	Rwy Idg 7002 TDZE 5628 Apt Elev 5673
--	------------------------	---


RNAV (GPS) RWY 30L

ROCKY MOUNTAIN METRO (BJC)


Baro-VNAV and VDP NA when using Denver Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Denver Intl altimeter setting and increase all DA 82 feet and all MDA 100 feet. Increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 6300 then climbing right turn to 10300 direct HYGEN and hold, continue climb-in-hold to 10300.


ATIS 126.25	DENVER APP CON 125.12 263.02	METRO TOWER ★ 118.6 (CTAF) 0 233.7	GND CON 121.7	CLNC DEL 132.6
-----------------------	--	--	-------------------------	--------------------------

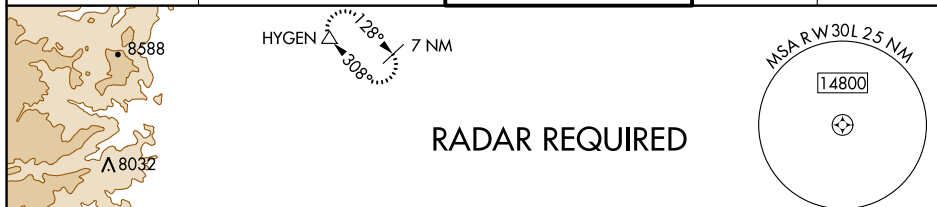

RADAR REQUIRED

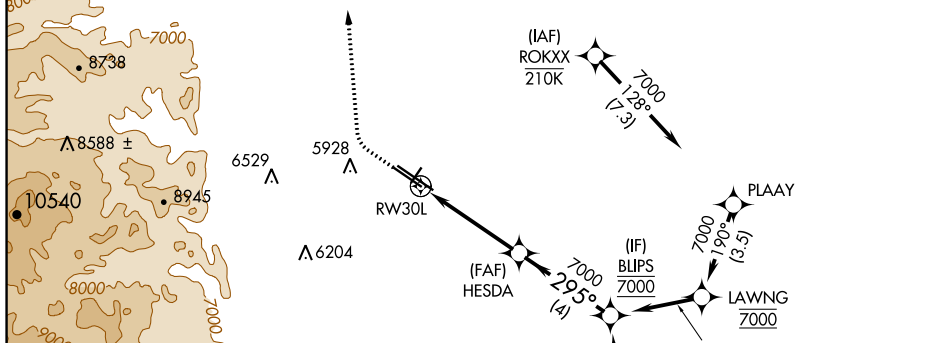

ELEV	5673	D	TDZE	5628
------	------	----------	------	------

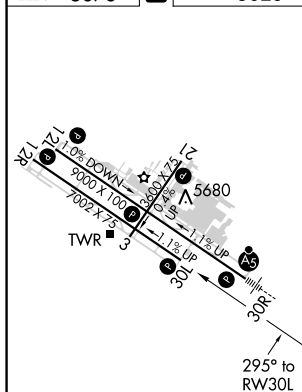

HIRL Rwy 12L-30R **L**
MIRL Rwy 3-21 and 12R-30L **L**
REIL Rwy 12L, 12R and 30L **L**

CATEGORY	A	B	C	D
LPV DA		5828- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)	
RNAV/VNAV DA		5926-1 $\frac{1}{8}$	298 (300-1 $\frac{1}{8}$)	
RNAV MDA		5960-1	332 (300-1)	

CIRCLING	6180-1 507 (600-1)	6240-1 567 (600-1)	6360-2 687 (700-2)	6860-3 1187 (1200-3)
----------	-----------------------	-----------------------	-----------------------	-------------------------

RNAV (GPS) RWY 30L