

WAAS CH <b>40333</b> <b>W13A</b>	APP CRS <b>135°</b>	Rwy Idg <b>4007</b> TDZE <b>820</b> Apt Elev <b>820</b>
--	------------------------	---

# RNAV (GPS) RWY 13

RNP APCH-GPS.


**T** Baro-VNAV NA when using Grafton altimeter setting. For uncompensated  
**A** Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Grafton altimeter setting and increase LPV DA to 1082 feet; increase LNAV/VNAV DA to 1161 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

**MISSED APPROACH:** Climb to 2800  
direct HOGEB and hold.

AWOS-3  
126.475

MINNEAPOLIS CENTER  
132.15 269.6

UNICOM  
122.8 (CTAF) **L**

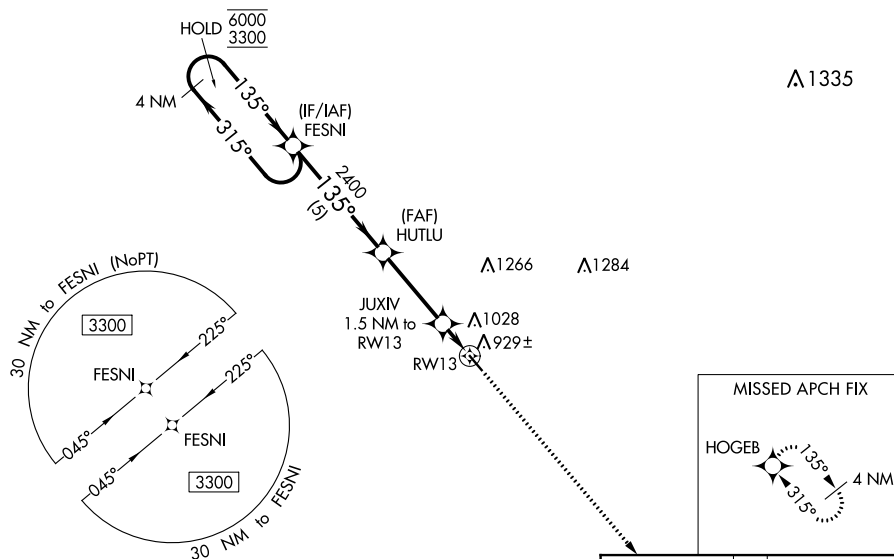

ELEV 820	TDZE 820
----------	----------

REIL Rwy 13 and 31 **L**  
MIRL Rwy 13-31 **L**