
visibility ¼ mile, LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅓ mile and Circling


WAAS 6701 Rwy Idg APP CRS TDZE 1301 CH **77900** 130° Apt Elev 1304 W13A

RNAV (GPS) RWY 13 MITCHELL MUNI (MHE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA with Huron Rgnl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet. Increase LPV all Cats MISSED APPROACH: Climb to

3200 direct JUTUB and hold.

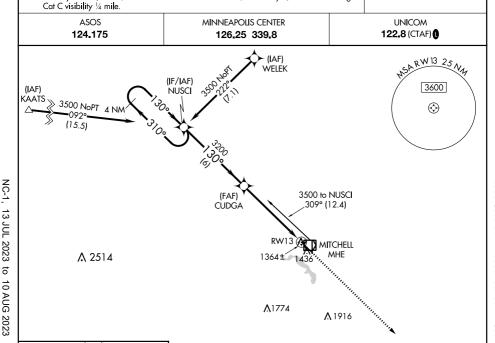

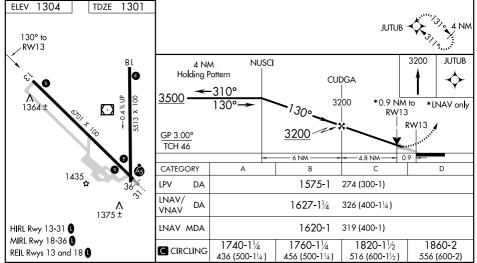

MITCHELL, SOUTH DAKOTA Orig-A 10DEC15

MITCHELL MUNI (MHE) RNAV (GPS) RWY 13