Α

SC4,

13 JUL 2023 to 10 AUG 2023

WAAS Rwy Idg 5510 APP CRS CH 61302 TDŻE 177° W18A Apt Elev

## RNAV (GPS) RWY 18R LAKEFRONT (NEW)

Inoperative table does not apply to LPV all Cats. For inoperative MALSR, increase LNAV Cat A and B visibility to 1 mile. Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received; use Louis Armstrong New Orleans Intl altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV and Circling Cat C and D visibility ¼ mile. VDP NA with Louis Armstrong New Orleans Intl altimeter setting. For inoperative MALSR when using Louis Armstrong New Orleans Intl altimeter setting, increase LNAV Cat A and B visibility to 1 mile.

MALSR


MISSED APPROACH: Climb to 2100 direct WUDON and left turn on track 082° to MORLE and on track 356° to SNAKI and hold.

**NEW ORLEANS APP CON ATIS** NORTH 133.15 290.3 124.9 SOUTH

LAKEFRONT TOWER \* 118.95(CTAF) (

GND CON 121,7

CLNC DEL 127.4

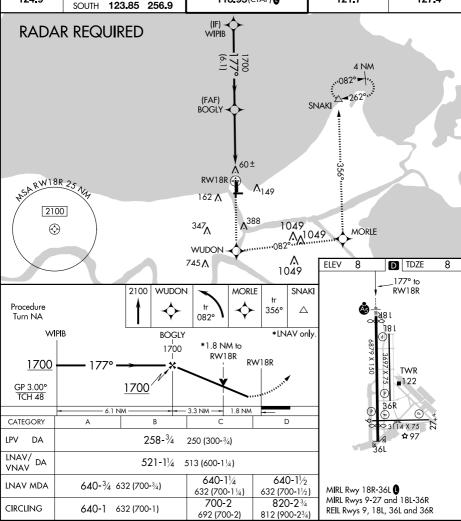

NEW ORLEANS, LOUISIANA

Amdt 2A 17JUN21

LAKEFRONT (NEW) 30°03′N-90°02′W