WAAS CH 56303 W02A	APP CRS 021°	Rwy ldg 8000 TDZE 867 Apt Elev 871

RNAV (GPS) RWY 2

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using General Downing-Peoria Intl altimeter setting. When local altimeter setting not received, use General Downing-Peoria Intl altimeter setting: increase all DA 116 feet and all MDA 120 feet; increase LPV and LNAV/VNAV all Cats visibility ½ SM, LNAV Cats C/D visibility ⅜ SM, and Circling all Cats visibility ¼ SM. Inop table does not apply.

MALSR

MISSED APPROACH: Climb to 3000 direct ZEMEN then on track 335° to KAPPA and hold.

ATIS	SAINT LOUIS APP CON	BLOOMINGTON TOWER ★	GND CON	UNICOM
135.35	128.725 256.9	124.6 (CTAF) L 269.575	121.65	122.95

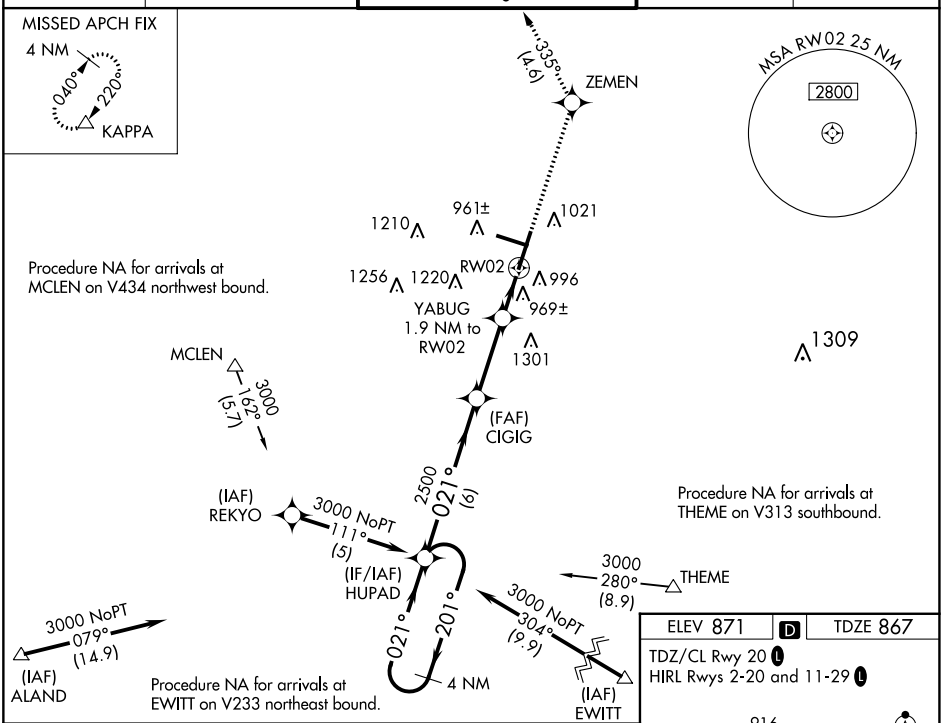

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

3000	ZEMEN	tr 335°	KAPPA

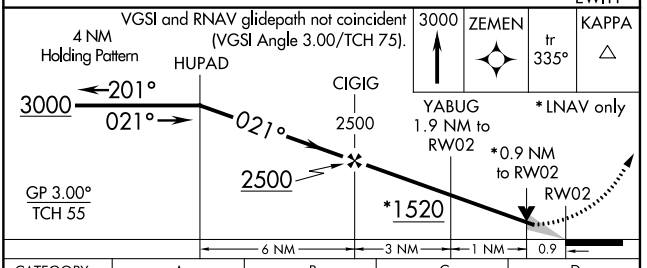

CATEGORY	A	B	C	D
LPV DA	1214-1¼ 347 (400-1¼)			
LNAV/VNAV DA	1269-1¼ 402 (400-1¼)			
LNAV MDA	1220-1 353 (400-1)		1220-1¼ 353 (400-1¼)	
C CIRCLING	1340-1 469 (500-1)		1620-2¼ 749 (800-2¼)	1620-2½ 749 (800-2½)

ELEV 871 D TDZE 867

TDZ/CL Rwy 20 L

HIRL Rwys 2-20 and 11-29 L

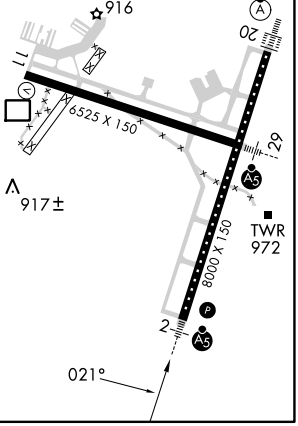

EC-3, 13 JUL 2023 to 10 AUG 2023
EC-3, 13 JUL 2023 to 10 AUG 2023