

WAAS CH 78325 W02A	APP CRS 018°	Rwy Idg TDZE Apt Elev	6001 484 501
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2

JOHN C TUNE (JWN)


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA E of Rwy 2-20. Baro-VNAV and VDP NA when using Nashville Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Nashville Intl altimeter setting and increase all DAs 39 feet and all MDAs 40 feet; increase LPV visibility all Cats ⅓ SM, LNAV visibility Cat B ¼ SM.

MISSED APPROACH:
Climb to 3000 direct BICOL and hold.

ATIS 127.075	NASHVILLE APP CON 119.35 372.0	JOHN TUNE TOWER ★ 119.45 (CTAF) 0	GND CON 121.7	CLNC DEL 121.7	CLNC DEL 124.55 (when twr closed)	UNICOM 122.7
------------------------	--	---	-------------------------	--------------------------	--	------------------------

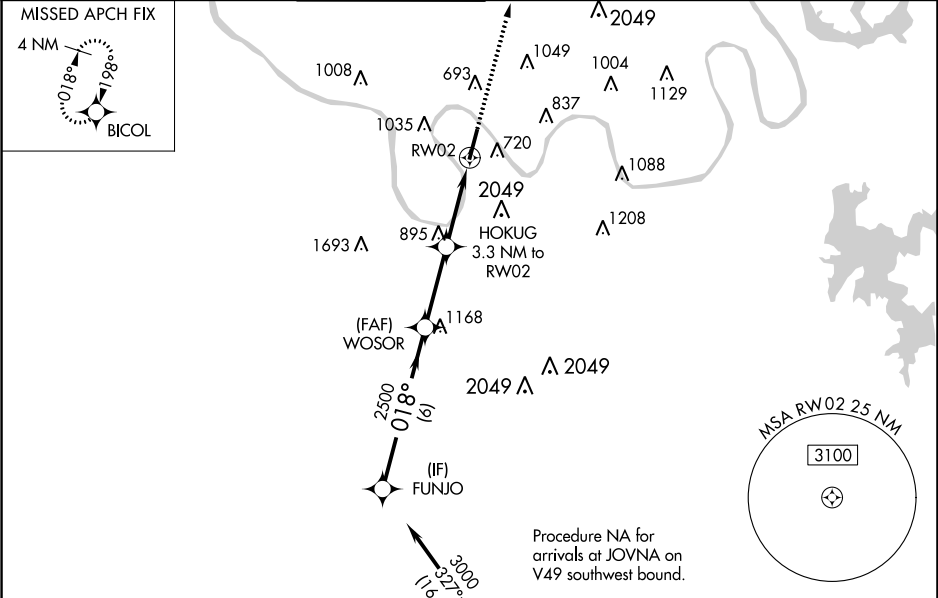

ELEV 501 TDZE 484

GP 3.00°
TCH 40

FUNJO

WOSOR

HOKUG
3.3 NM to
RW02

RW02

3000

2500

2500

1540

018°

072°

6 NM

3 NM

1.2 NM

2.1 NM

A

B

C

D

LPV DA

734-7⁄8

250 (300-7⁄8)

LNAV/VNAV DA

1079-2 1⁄2

595 (600-2 1⁄2)

LNAV MDA

1160-1

676 (700-1)

1160-2

676 (700-2)

CIRCLING

1200-1

699 (700-1)

1340-2 3⁄4

839 (900-2 3⁄4)

3000

BICOL

* LNAV only.

MIRL Rwy 2-20

REIL Rwys 2 and 20