

WAAS CH <b>63022</b> <b>W06A</b>	APP CRS <b>067°</b>	Rwy Idg TDZE Apt Elev	<b>5500</b> <b>665</b> <b>665</b>
--	------------------------	-----------------------------	---



**RNAV (GPS) RWY 6**  
SANDUSKY COUNTY RGNL (S24)

RNP APCH.


**⚠** Baro-VNAV and VDP NA when using Toledo Express altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Toledo Express altimeter setting: increase LPV DA to 1008 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 1041 feet and all visibilities ¾ SM; increase all MDA 100 feet and LNAV visibility Cat C and D ¾ SM and Circling visibility Cat C and D ½ SM.

**MISSED APPROACH:**  
Climb to 3000 direct  
OBOZE and hold.

AWOS-3P <b>119.575</b>	TOLEDO APP CON <b>126.1 307.0</b>	UNICOM <b>123.05 (CTAF) 0</b>
---------------------------	--------------------------------------	----------------------------------

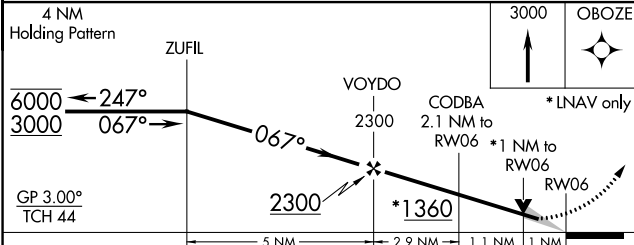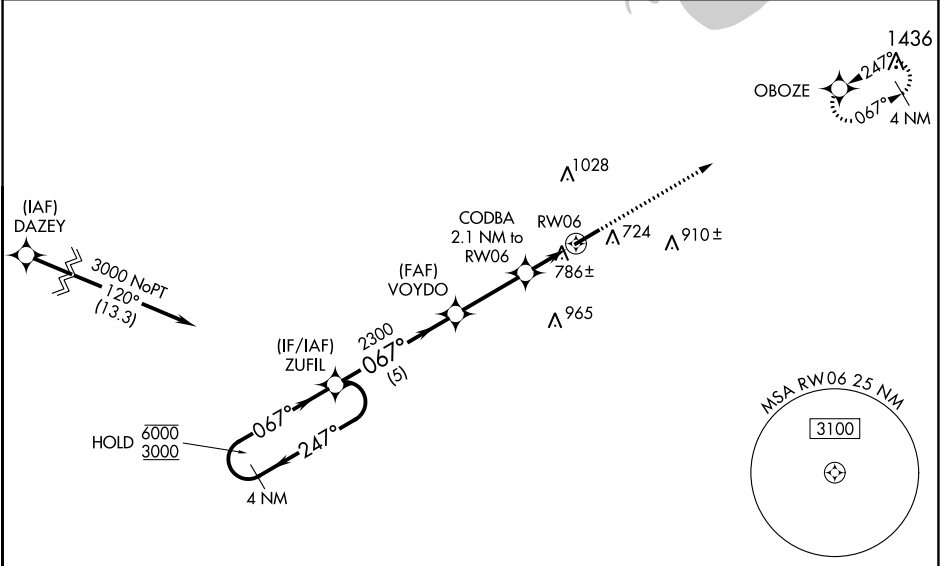

CATEGORY	A	B	C	D
LPV DA		915-¾	250 (300-¾)	
LNAV/VNAV DA		948-⅞	283 (300-⅞)	
LNAV MDA		1040-1	375 (400-1)	
<b>C</b> CIRCLING	1120-1 455 (500-1)	1160-1 495 (500-1)	1380-2 715 (800-2)	1380-2¼ 715 (800-2¼)

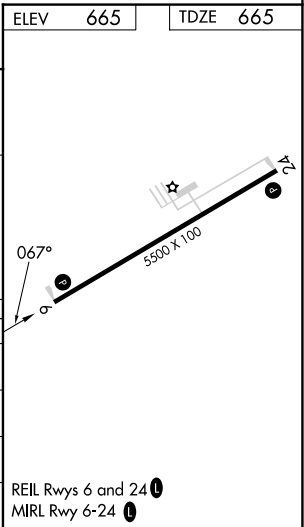

EC-2, 13 JUL 2023 to 10 AUG 2023

EC-2, 13 JUL 2023 to 10 AUG 2023