RNP APCH.

A

to 10 AUG 2023

NW-1, 13 JUL 2023

WAAS 7100 Rwy Idg APP CRS CH 40243 TDŹE 2567 0490 Apt Elev W05B 2567

> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20° C or above 54° C. For inop ALS, increase LPV all Cats


visibility to RVR 4500 and LNAV Cat C/D visibility to 1% SM.


†RVR 1800 authorized with use of FD or AP or HUD to DA.

RNAV (GPS) RWY 5 PULLMAN/MOSCOW RGNL (PUW)

MISSED APPROACH: Climb to 3460 then

MALSR climbing left turn to 5400 direct PLUUR and hold. #Missed approach requires minimum climb of 250 feet per NM to 4800.

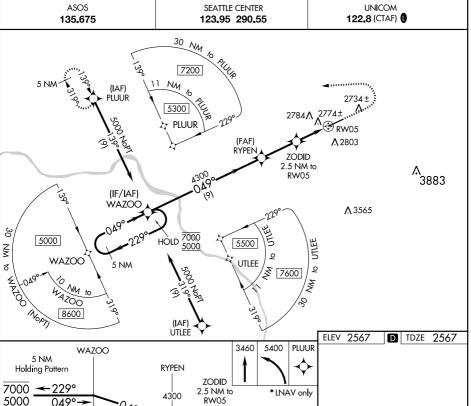

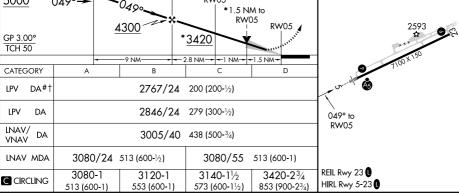

PULLMAN/MOSCOW, WASHINGTON

Amdt 3A 30JAN20

PULLMAN/MOSCOW RGNL (PUW) RNAV (GPS) RWY 5