

SPRINGFIELD, KENTUCKY

AL-6510 (FAA)

21280

WAAS CH 45722 W11A	APP CRS 110°	Rwy Idg 4876 TDZE 854 Apt Elev 871
--	------------------------	---

APP CRS
1100

Rwy Idg	4876
TDZE	854
Apt Elev	871

RNAV (GPS) RWY 11

LEBANON SPRINGFIELD-GEORGE HOERTER FLD (6I2)

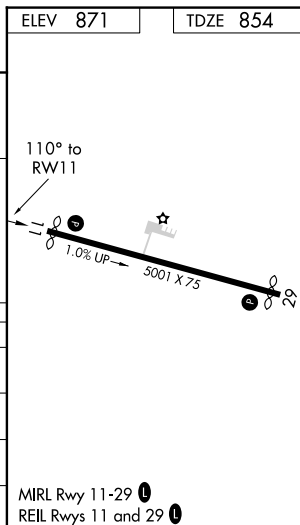
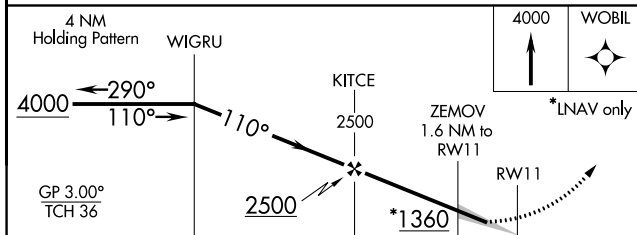
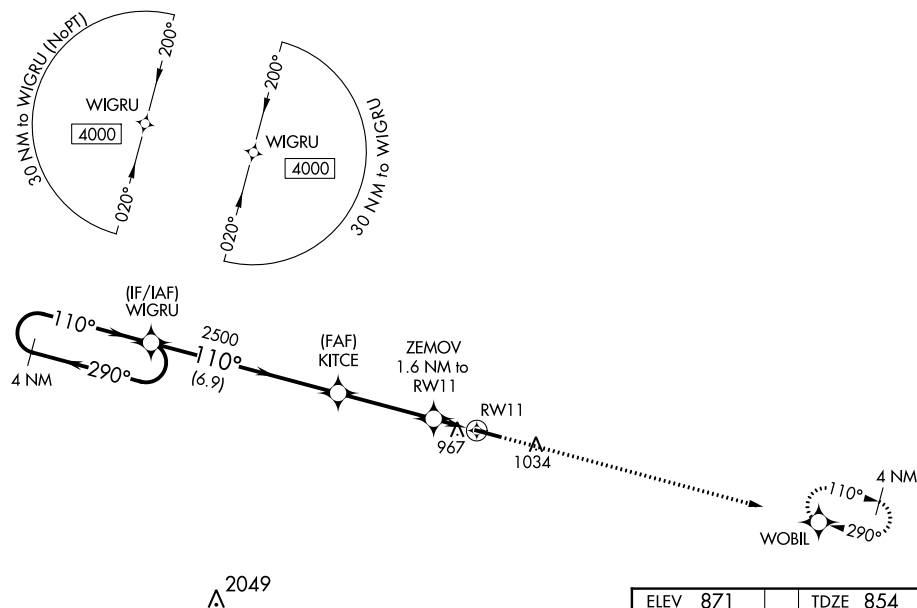
RNP APCH.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
▲ When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅓ mile. Baro-VNAV NA when using Danville altimeter setting.

MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.

AWOS-3P
119.725

INDIANAPOLIS CENTER
124.625 371.925

UNICOM
122.8 (CTAF) **L**

CATEGORY		A	B	C	D
LPV	DA	1104-1		250 (300-1)	
LNAV/ VNAV	DA	1159-1 $\frac{1}{8}$		305 (300-1 $\frac{1}{8}$)	
LNAV	MDA	1220-1		366 (400-1)	
 CIRCLING		1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1 $\frac{1}{2}$ 489 (500-1 $\frac{1}{2}$)	1500-2 629 (700-2)

SPRINGFIELD, KENTUCKY

Amdt 1A 30JAN20

LEBANON SPRINGFIELD-GEORGE HOERTER FLD(6T2)

37°38'N-85°15'W

RNAV (GPS) RWY 11

SE-1, 13 JUL 2023 to 10 AUG 2023