



WAAS CH <b>93641</b> <b>W17A</b>	APP CRS <b>167°</b>	Rwy Idg TDZE Apt Elev	<b>8001</b> <b>2164</b> <b>2164</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

ASHEVILLE RGNL (AVL)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 6200 direct AVEBE and hold, continue climb-in-hold to 6200.
<div><div></div><div></div></div> <div>Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 2 1/2 SM and increase LNAV Cats C/D visibility to 2 SM.</div>	<div><div></div><div></div></div>	

ATIS <b>120.2</b>	ASHEVILLE APP CON* <b>124.65 269.575</b>	ASHEVILLE TOWER* <b>121.1 (CTAF) 0 257.8</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
----------------------	---	---	-------------------------	-------------------------

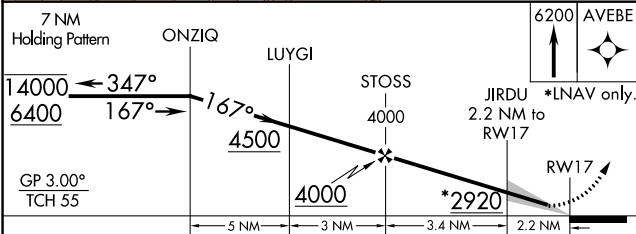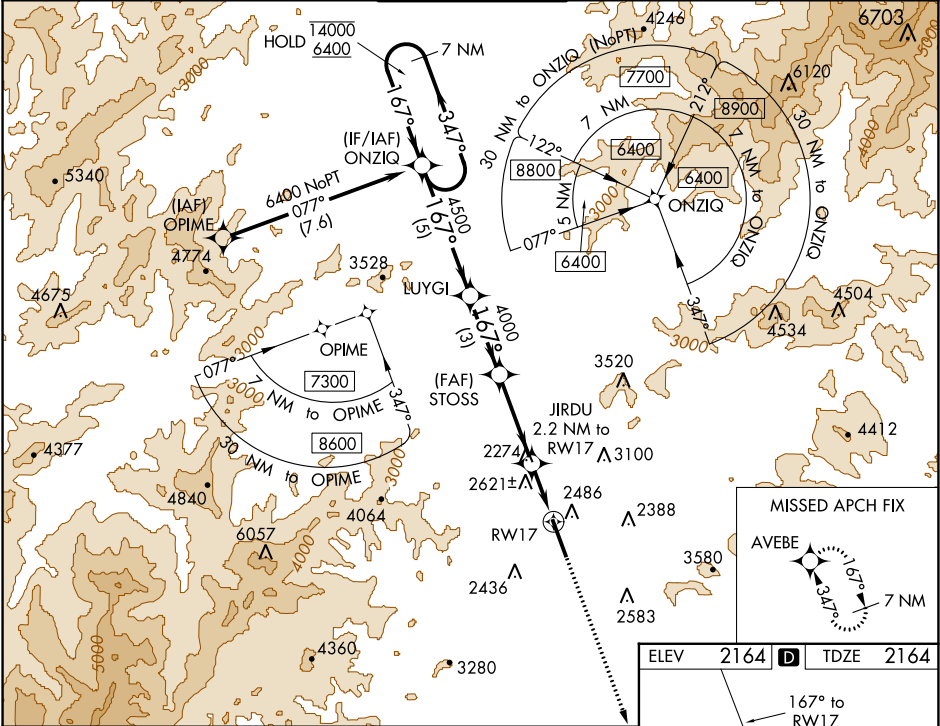

CATEGORY	A	B	C	D
LPV DA		2364-1/2	200 (200-1/2)	
LNAV/VNAV DA		2960-13/4	796 (800-13/4)	
LNAV MDA	2880-1/2	716 (800-1/2)	2880-15/8	716 (800-15/8)
CIRCLING	2880-1	716 (800-1)	3460-3 1296 (1300-3)	3720-3 1556 (1600-3)

