

WAAS CH <b>82023</b> <b>W10A</b>	APP CRS <b>103°</b>	Rwy Idg <b>5001</b> TDZE <b>2502</b> Apt Elev <b>2504</b>
--	------------------------	---

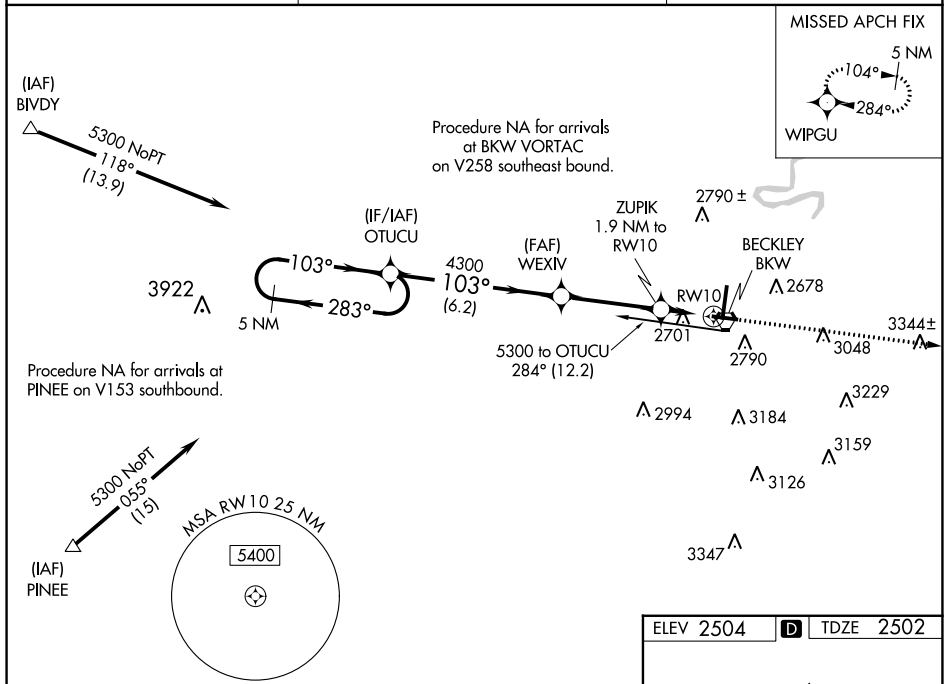
# RNAV (GPS) RWY 10

## RALEIGH COUNTY MEML (BKW)

**A** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 28°C (82°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Bluefield altimeter setting. When local altimeter not received, use Bluefield altimeter setting and increase all DA 118 feet and all MDA 120 feet; increase LPV all Cats visibility  $\frac{1}{4}$  SM, LNAV/VNAV all Cats visibility  $\frac{1}{2}$  SM, LNAV Cat C/D visibility  $\frac{3}{8}$  SM, and Circling Cat C visibility  $\frac{1}{4}$  SM.

**MISSED APPROACH.**  
Climb to 5700 direct  
WIPGU and hold.

ASOS <b>121.55</b>	CHARLESTON APP CON <b>125.4 269.125</b>	UNICOM <b>123.0 (CTAF) 0</b>
-----------------------	--	---------------------------------

[illegible]