

WAAS CH <b>50217</b> <b>W27A</b>	APP CRS <b>271°</b>	Rwy Idg <b>6799</b> TDZE <b>1606</b> Apt Elev <b>1624</b>
--	------------------------	---

RNAV (GPS) RWY 27


RHINELANDER/ONEIDA COUNTY (RHI)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Tomahawk altimeter setting: increase LPV DA to 1865 feet and visibility ¼ SM; increase LNAV/VNAV DA to 2042 feet and visibility ¼ SM; increase all MDAs 60 feet and visibility Cat C and D ¼ SM. Baro-VNAV and VDP NA when using Tomahawk altimeter setting.

MISSED APPROACH:  
Climb to 4000 direct ECANA and hold.

ASOS <b>126.825</b>	MINNEAPOLIS CENTER <b>133.65 281.5</b>	UNICOM <b>123.0(CTAF) 0</b>
------------------------	---	--------------------------------

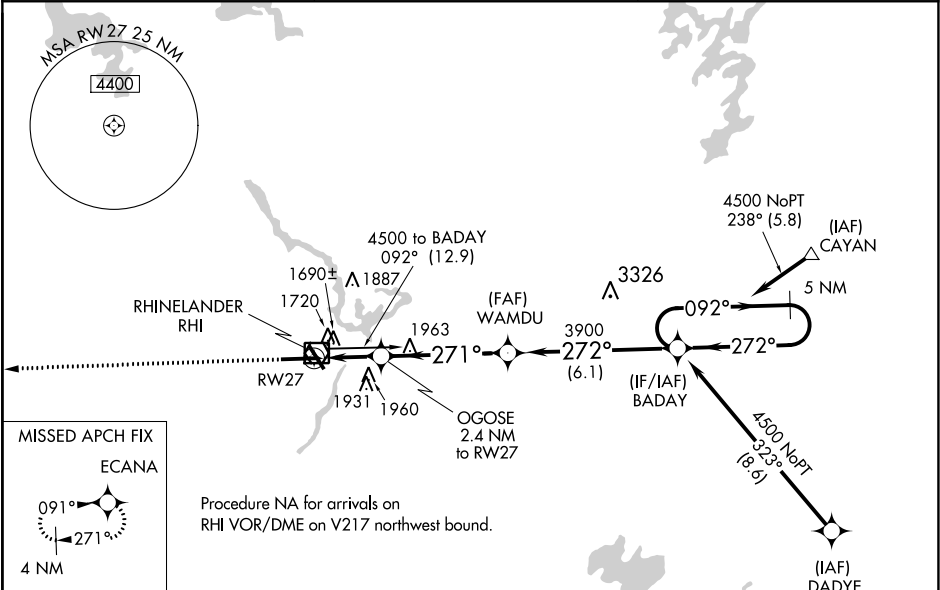

ELEV 1624	<b>D</b>	TDZE 1606
-----------	----------	-----------

271° to RW27

4000 ECANA

OGOSE 2.4 NM to RW27

\* 1.7 NM to RW27

\* 2420

6800 X 150

0.4% UP

500 X 100

1659

33

WAMDU	BADAY	5 NM Holding Pattern
3900	272°	092° → 4500
	← 272°	
		GP 3.00° TCH 50

CATEGORY	A	B	C	D
LPV DA	1806-3¼ 200 (200-¾)			
LNAV/VNAV DA	1983-1¼ 377 (400-1¼)			
LNAV MDA	2180-1 574 (600-1)	2180-1½ 574 (600-1½)	2180-1¾ 574 (600-1¾)	2180-2 574 (600-2)
CIRCLING	2180-1 556 (600-1)	2260-1 636 (700-1)	2260-1¾ 636 (700-1¾)	2280-2 656 (700-2)