

WAAS  
CH **45602**  
**W21B**

APP CRS  
**210°**

Rwy ldg  
TDZE  
**626**  
Apt Elev  
**640**

**RNAV (GPS) Z RWY 21**

CHARLOTTESVILLE-ALBEMARLE (CHO)

RNP APCH.  


▼

▲

Baro-VNAV NA when using Staunton/Waynesboro/Harrisonburg altimeter setting.  
For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C.  
When local altimeter setting not received, use Staunton/Waynesboro/Harrisonburg altimeter setting and increase all DA 130 feet and LPV visibility ½ mile.

MISSED APPROACH: Climb to 1100, then climbing left turn to 4000 direct GVE VORTAC and hold.

ATIS <b>118.425</b>	POTOMAC APP CON <b>132.85 323.125</b>	CHARLOTTESVILLE TOWER ★ <b>124.5 (CTAF) 0 338.275</b>	GND CON <b>121.9 338.275</b>	UNICOM <b>122.95</b>
------------------------	--	--	---------------------------------	-------------------------

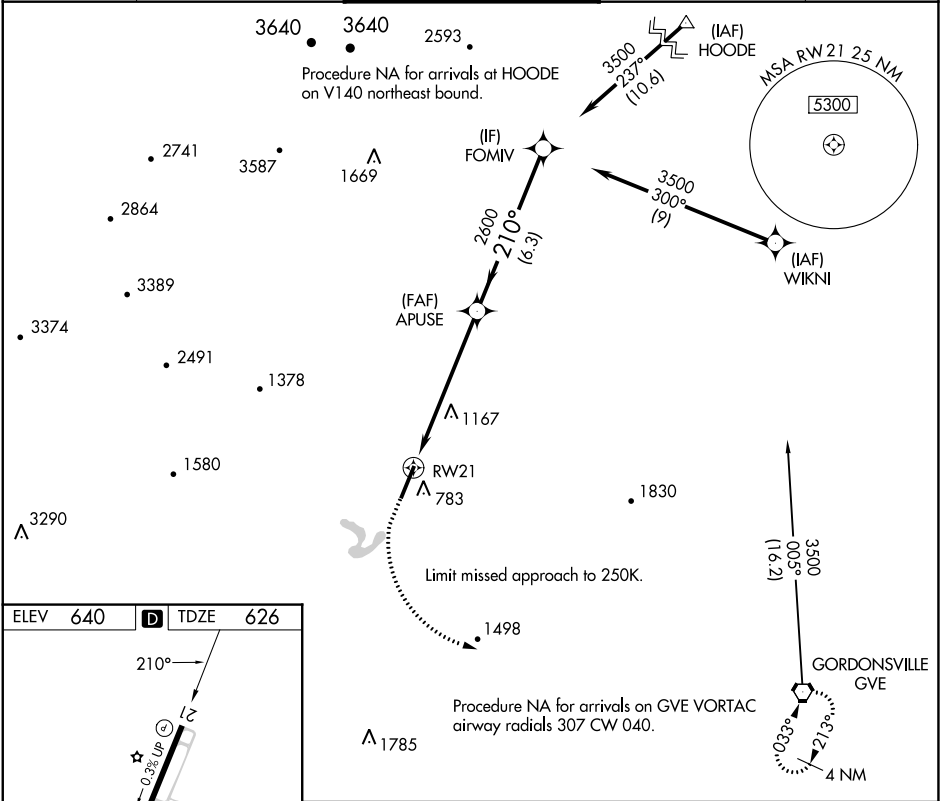

ELEV 640 D TDZE 626

1100

4000

GVE

RW21

APUSE 2600

FOMIV 3500

GP 3.00°

TCH 50

CATEGORY	A	B	C	D
LPV DA	826-1 200 (200-1)			
LNAV/VNAV DA	1588-4 962 (1000-4)			