

APP CRS
344°

Rwy Idg
TDZE
2724

Apt Elev
2724

RNAV (GPS) RWY 34

ROSEBUD SIOUX TRIBAL (SUO)

RNP APCH - GPS.


▼

▲ NA

Rwy 34 helicopter visibility reduction below 1 SM NA. Use Valentine altimeter setting, when not received, use Martin altimeter setting and increase all MDAs 100 feet and LNAV visibility Cat B ¼ SM, Cat C ½ SM, and Circling visibility Cat B ¼ SM, Cat C ½ SM. Procedure NA at night.

MISSED APPROACH: Climb to 3400 then climbing right turn to 5000 direct GLUGS and hold.

VTN ASOS 118.075	DENVER CENTER 127.95 338.2	CTAF 122.9
----------------------------	--------------------------------------	----------------------

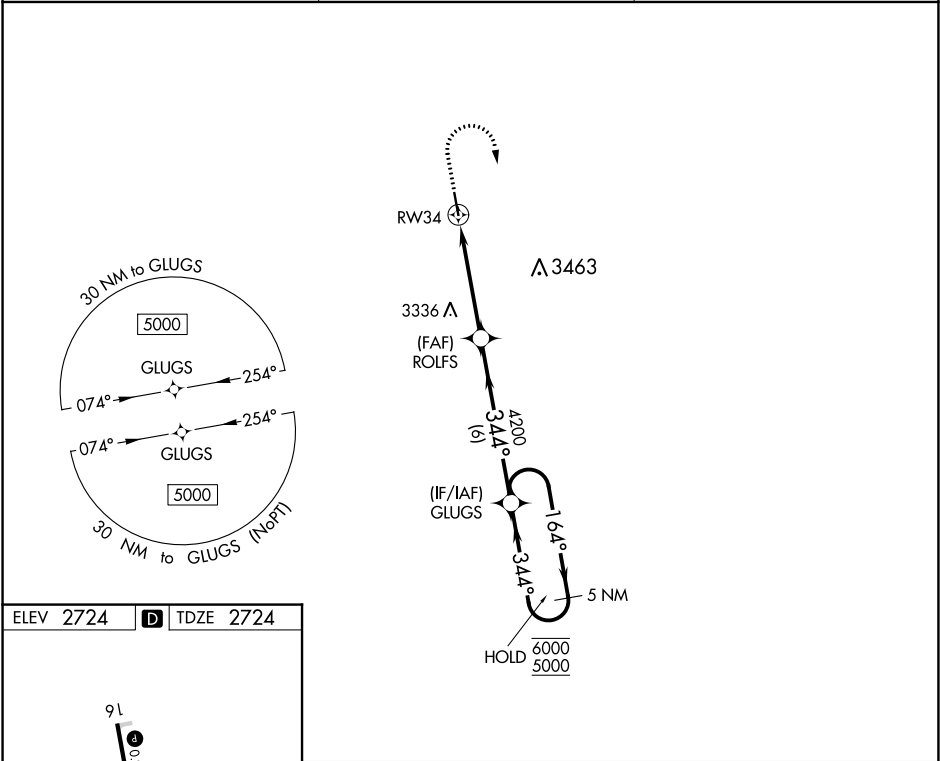

ELEV 2724

D

TDZE 2724

3400

5000

GLUGS

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 30).

ROLFS

GLUGS

5 NM Holding Pattern

RW34

3400

344°

4200

344°

6000

5000

4.5 NM

6 NM

CATEGORY	A	B	C	D
LNAV MDA	3380-1	656 (700-1)	3380-1 7/8 656 (700-1 7/8)	NA
CIRCLING	3380-1	656 (700-1)	3440-2 716 (800-2)	NA