

WAAS CH <b>69629</b> <b>W32A</b>	APP CRS <b>317°</b>	Rwy Idg TDZE Apt Elev	<b>6236</b> <b>2605</b> <b>2613</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32

PECOS MUNI (P/E/Q)


RNP APCH - GPS.

▼


Baro-VNAV and VDP NA when using Wink altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Wink altimeter setting: increase LPV DA to 2900 feet, LNAV/VNAV DA to 2950 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility Cat C and LNAV Cat D ¼ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH:  
Climb to 4600 direct WALOM and hold.

AWOS-3 <b>118.175</b>	ALBUQUERQUE CENTER <b>135.875 292.15</b>	UNICOM <b>122.8 (CTAF) ①</b>
--------------------------	---	---------------------------------

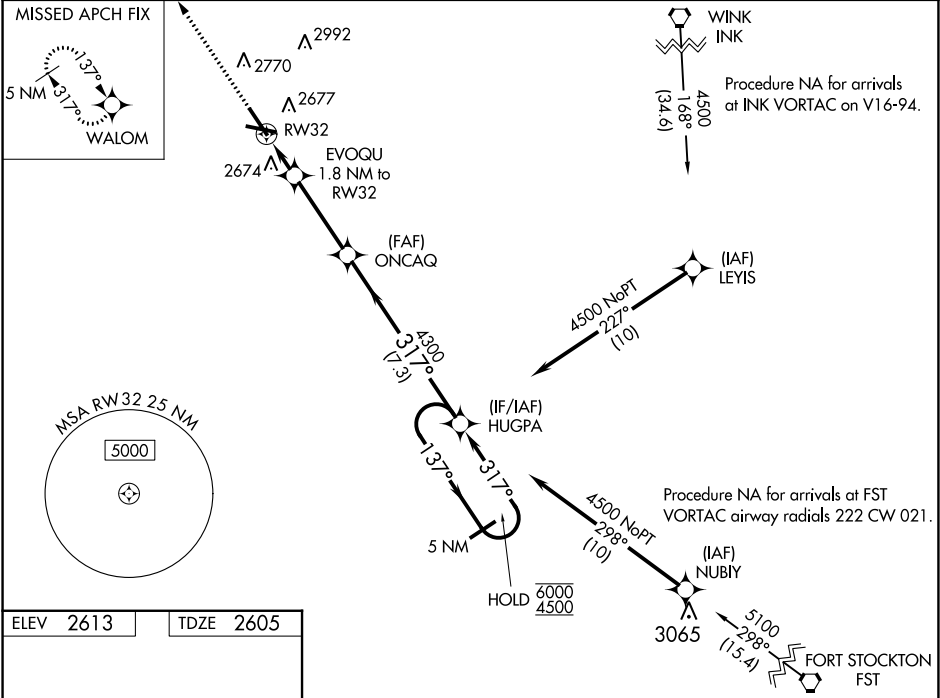

ELEV 2613	TDZE 2605
-----------	-----------

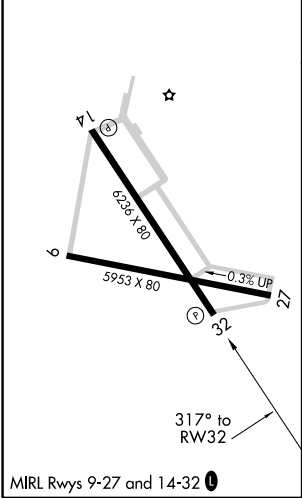

4600

↑

WALOM

✳

5 NM Holding Pattern

HUGPA

137° →

← 317°

6000

4500

EVOQU

1.8 NM to RW32

ONCAQ

4300

0.9 NM to RW32

↓

RW32

3200

4300

GP 3.00°

TCH 40

0.9

0.9 NM

3.4 NM

7.3 NM

CATEGORY	A	B	C	D
LPV DA	2805-¾		200 (200-¾)	
LNAV/ VNAV DA	2855-¾		250 (300-¾)	
LNAV MDA	2940-1		335 (400-1)	
<div> <div>C</div> <div>CIRCLING</div> </div>	3060-1 447 (500-1)	3140-1 527 (600-1)	3360-2¼ 747 (800-2¼)	3360-2½ 747 (800-2½)

SC-3, 13 JUL 2023 to 10 AUG 2023

SC-3, 13 JUL 2023 to 10 AUG 2023