

WAAS CH <b>97709</b> <b>W09A</b>	APP CRS <b>089°</b>	Rwy Idg TDZE Apt Elev	<b>5503</b> <b>385</b> <b>387</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9



HENDERSON CITY-COUNTY (EHR)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48° C.  
Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using  
Evansville altimeter setting. When local altimeter setting not received, use Evansville altimeter  
setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats, LNAV/VNAV all  
Cats and LNAV Cats C/D visibilities ¼ mile.

MISSED APPROACH:  
Climb to 2500 direct  
ONZIG and hold.

AWOS-3PT <b>118.85</b>	EVANSVILLE APP CON ★ <b>124.025 257.8</b>	UNICOM <b>122.8</b> (CTAF) <b>0</b>
---------------------------	--	--

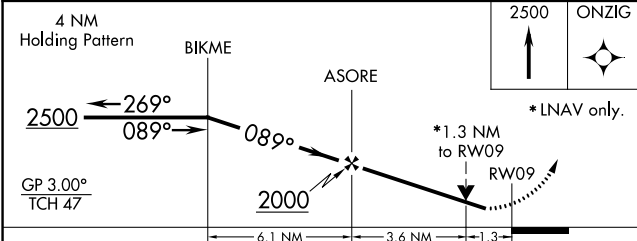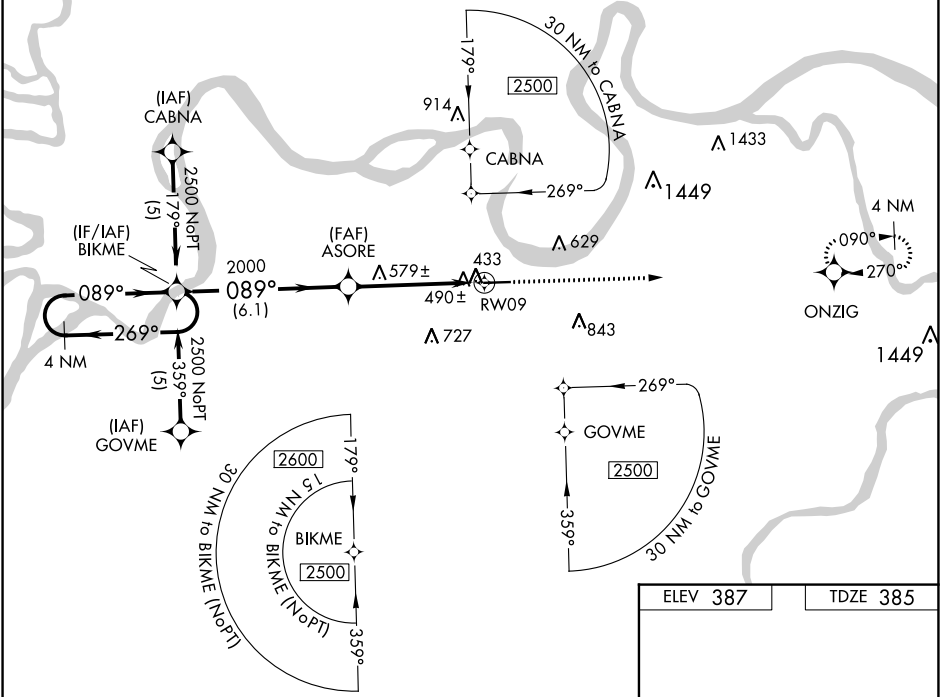

CATEGORY	A	B	C	D
LPV DA	694-1 309 (400-1)			
LNAV/VNAV DA	774-1¼ 389 (400-1¼)			
LNAV MDA	840-1 455 (500-1)	840-1⅝ 455 (500-1⅝)	840-1½ 455 (500-1½)	

ELEV 387 TDZE 385

2500 ONZIG

5503 X 100

089°

REIL Rwy 9 and 27 **0**  
MIRL Rwy 9-27 **0**