




WAAS CH 90122 W27B	APP CRS 268°	Rwy Idg 8864 TDZE 11 Apt Elev 36
--	------------------------	---

RNAV (GPS) RWY 27R
PHILADELPHIA INTL (PHL)

 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV cat Cts visibility to 1 3/4 SM and LNAV C/D to 2 SM.		 MALSR		MISSED APPROACH: Climb to 3000 direct LANDI and on track 294° to MXE VORTAC and hold.	
D-ATIS ARR 133.4 DEP 135.925		PHILADELPHIA APP CON 124.35 319.15		PHILADELPHIA TOWER 118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35) 135.1 327.05 (Rwy 9R/27L)	
				GND CON 121.9 348.6	
				CLNC DEL 118.85 348.6	

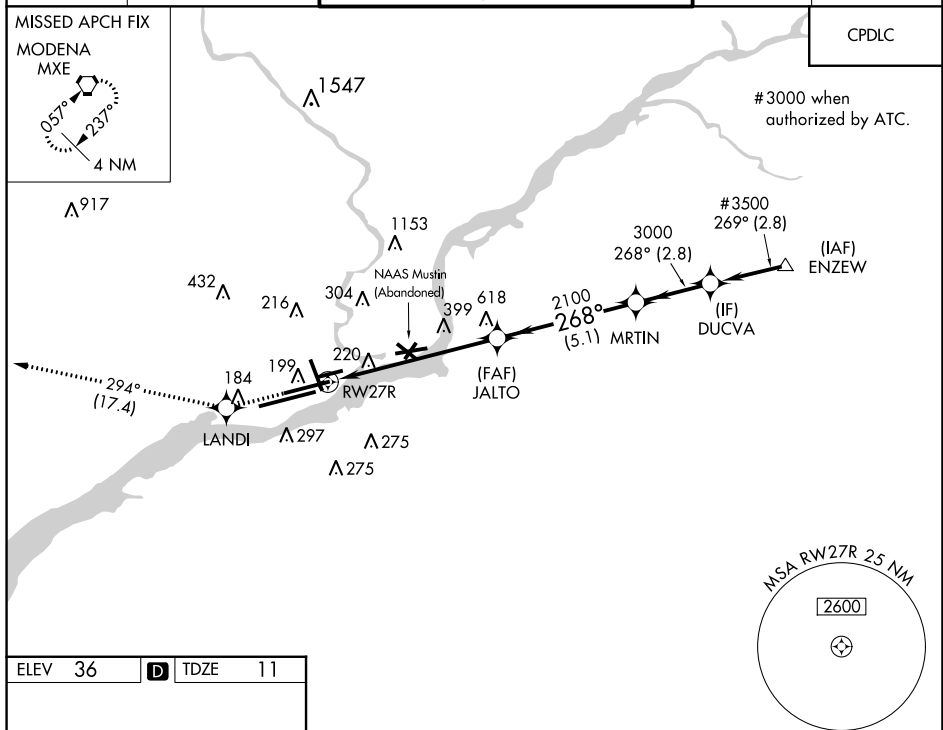

CATEGORY	A	B	C	D
LPV DA	267/24 256 (300-1/2)			
RNAV/VNAV DA	520/60 509 (500-1 1/4)			
RNAV MDA	720/24 709 (700-1/2)		720-1 1/2 709 (700-1 1/2)	720-1 3/4 709 (700-1 3/4)
CIRCLING	720-1 684 (700-1)		720-2 684 (700-2)	720-2 1/4 684 (700-2 1/4)