

WAAS CH <b>45532</b> <b>W24A</b>	APP CRS <b>240°</b>	Rwy Idg <b>5108</b> TDZE <b>592</b> Apt Elev <b>592</b>
--	------------------------	---



## RNAV (GPS) Z RWY 24

NIAGARA FALLS INTL (IAG)

**▼** DME/DME RNP-0.3 NA. When local altimeter setting not received, use Buffalo Niagara  
**▲** Initial altimeter setting and increase all MDA 60 feet; increase LP Cats C and D visibility  
 ¼ SM, LNAV Cats C and D visibility ½ SM, and Circling Cat C and D visibility ¼ SM.  
 Rwy 6, 10R, 24, 28L helicopter visibility reduction below 1 SM NA. Straight-in Rwy 24  
 NA at night, Circling Rwy 6, 10R, 24, 28L NA at night. \*Missed approach requires a minimum  
 climb of 265 feet per NM to 2120; if unable to meet climb gradient, see RNAV (GPS) Y Rwy 24.

**MISSED APPROACH:** Climb to 1400 then climbing left turn to 3600 direct ZUPUV and hold.

ATIS	BUFFALO APP CON	NIAGARA TOWER★	GND CON	CLNC DEL	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) 0 349.0	125.3 275.8	119.25 251.1	122.95

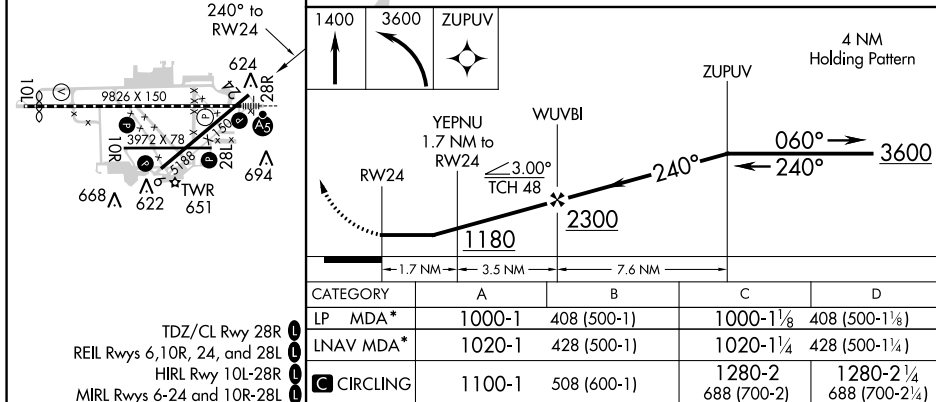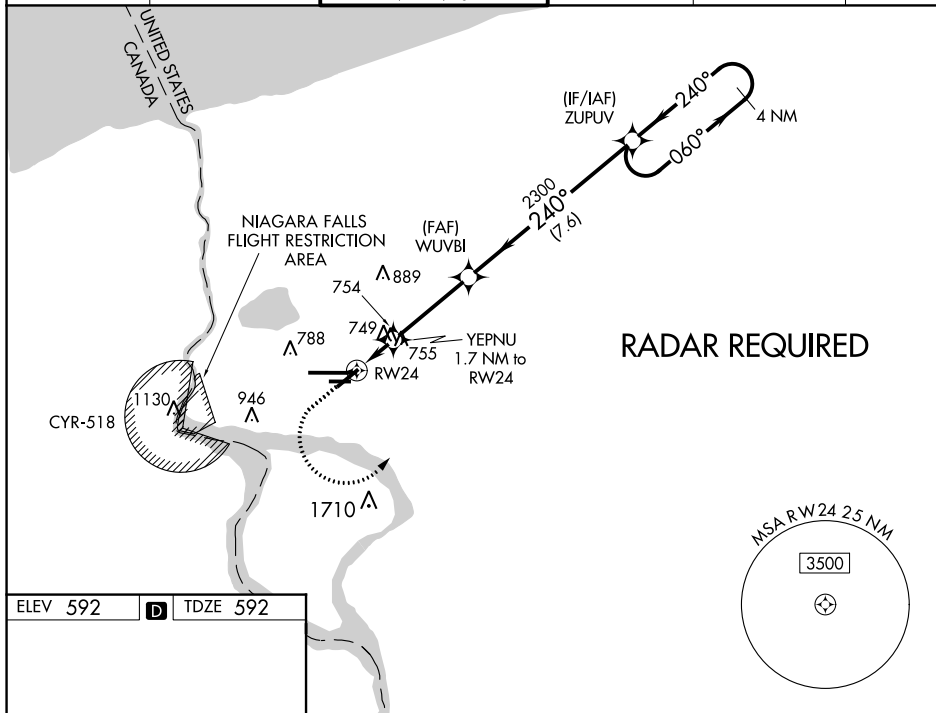

NIAGARA FALLS, NEW YORK

Orig-B 18JUN20

NIAGARA FALLS INTL (IAG)

RNAV (GPS) Z RWY 24

43°06'N-78°57'W

NE-2, 13 JUL 2023 to 10 AUG 2023