APP CRS Rwy Idg 9001 TDŹE 43 154° Apt Elev 46

13 JUL 2023 to


10 AUG 2023

RNAV (RNP) Z RWY 15

CHARLESTON AFB/INTL (CHS)

ALSF-2 For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) MISSED APPROACH: Climb V or above 54°C (130°F). GPS required. For inop ALSF, increase RNP 0.11 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000. to 3000 on track 154° (Å) III to SHRMP and hold. D-ATIS CHARLESTON APP CON CHARLESTON TOWER **GND CON** CLNC DEL

CPDLC 124.75 120.7 306.925 126.0 239.0 121.9 348.6 127,325 291,65 MISSED APCH FIX (IAF) 3000 LUTHR

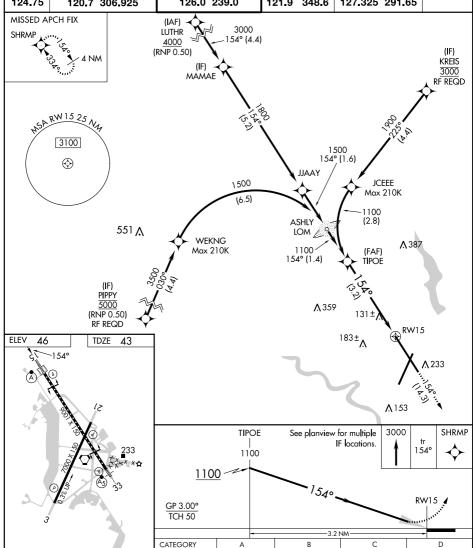

TDZ/CL Rwy 15 REIL Rwys 3 and 21 HIRL Rwys 3-21 and 15-33 CHARLESTON, SOUTH CAROLINA

Orig-B 11DEC14

CHARLESTON AFB/INTL (CHS) RNAV (RNP) Z RWY 15

272 (300-1/2)

385 (400-7/8)

315/24

428/45

AUTHORIZATION REQUIRED

RNP 0.11 DA

RNP 0.30 DA