

APP CRS  
**360°**

Rwy Idg  
TDZE  
**213**

Rwy Idg  
Apt Elev  
**213**

**RNAV (GPS) RWY 35**


WEST MEMPHIS MUNI (A W M)

RNP APCH.

When local altimeter setting not received, use Memphis Intl altimeter setting; increase all MDA 60 feet, increase LNAV Cat C and D and Circling Cat C and D visibility ¼ SM. Rwy 35 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2500 direct IMUDE and hold.

ASOS <b>118.175</b>	MEMPHIS APP CON <b>119.1 291.6</b>	CLNC DEL <b>121.7</b>	UNICOM <b>123.05 (CTAF) 0</b>
------------------------	---------------------------------------	--------------------------	----------------------------------

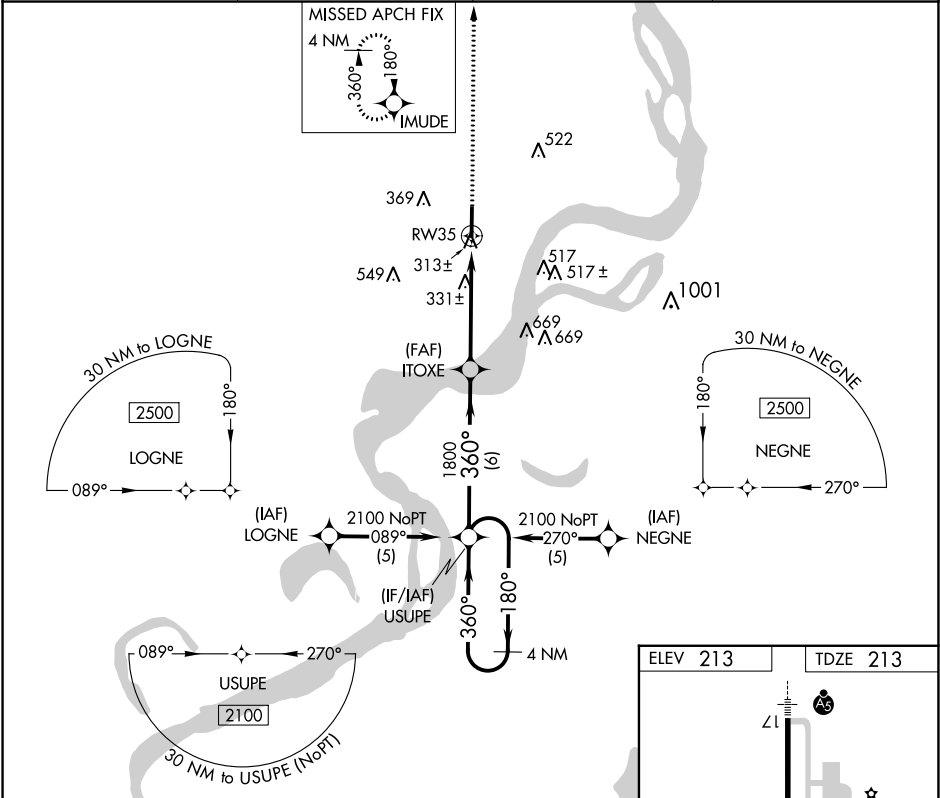

4 NM Holding Pattern

USUPE

2100

180°

360°

360°

1800

3.04° TCH 40

RW35

6 NM

4.8 NM

2500

IMUDE

CATEGORY	A	B	C	D
LNAV MDA	600-1	387 (400-1)	600-1 $\frac{1}{8}$ 387 (400-1 $\frac{1}{8}$ )	600-1 $\frac{1}{4}$ 387 (400-1 $\frac{1}{4}$ )
CIRCLING	640-1 427 (500-1)	740-1 527 (600-1)	800-1 $\frac{1}{2}$ 587 (600-1 $\frac{1}{2}$ )	920-2 $\frac{1}{4}$ 707 (800-2 $\frac{1}{4}$ )

ELEV 213

TDZE 213

6003 X 100

35

360° to RW35