

WAAS CH <b>62803</b> <b>W10A</b>	APP CRS <b>096°</b>	Rwy Idg TDZE Apt Elev	<b>4199</b> <b>673</b> <b>673</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 10

WOOD COUNTY (1G~~0~~)

RNP APCH.


▼

▲ NA

Circling Rwy 36 NA at night. VDP NA when using Toledo Express altimeter setting.  
When local altimeter setting not received, use Toledo Express altimeter setting: increase DA to 974 feet; increase all MDA 40 feet and LNAV Cat C visibility ¼ SM, Circling Cat C/D visibility ¼ SM.

MISSED APPROACH:  
Climb to 2300 direct MELIS and hold.

AWOS-3 <b>120.725</b>	TOLEDO APP CON <b>126.1 317.55</b>	CLNC DEL <b>125.6</b>	UNICOM <b>122.975 (CTAF) 0</b>
--------------------------	---------------------------------------	--------------------------	-----------------------------------

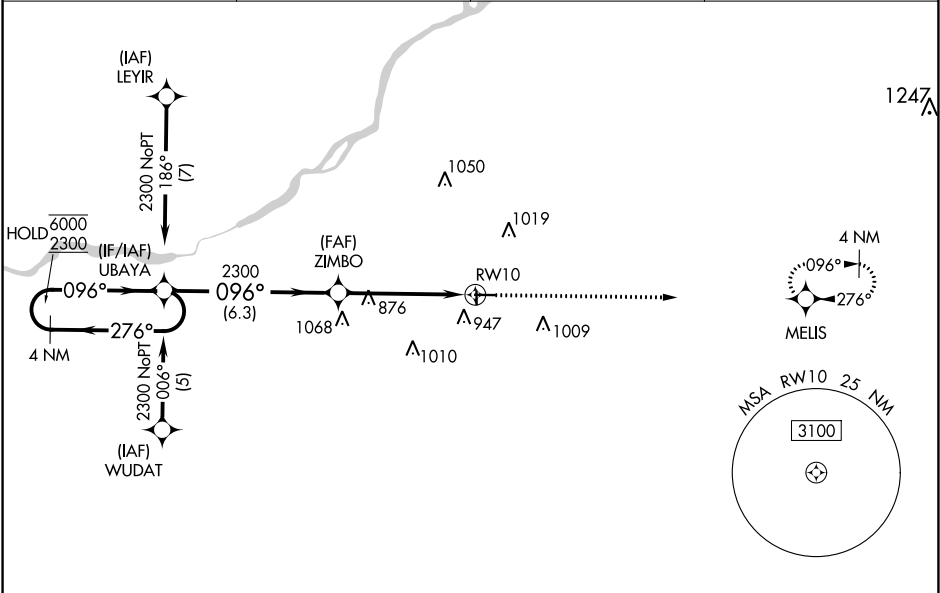

ELEV 673

TDZE 673

CATEGORY	A	B	C	D
LPV DA	939-1 266 (300-1)			
LNAV MDA	1160-1	487 (500-1)	1160-1 <sup>3</sup> / <sub>8</sub> 487 (500-1 <sup>3</sup> / <sub>8</sub> )	1160-1 <sup>1</sup> / <sub>2</sub> 487 (500-1 <sup>1</sup> / <sub>2</sub> )
CIRCLING	1300-1	627 (700-1)	1320-1 <sup>3</sup> / <sub>4</sub> 647 (700-1 <sup>3</sup> / <sub>4</sub> )	1320-2 647 (700-2)

REIL Rwy 10, 18, and 28 0  
MRL Rwy 10-28 and 18-36 0