

APP CRS	Rwy Idg	10000
267°	TDZE	86
	Apt Elev	96

RNAV (RNP) Y RWY 27

GEORGE BUSH INTCNTL/HOUSTON (IAH)


RNP AR APCH - GPS.

Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 4500.

ALSf-2

MISSED APPROACH: Climb to 560 then climbing left turn to 3000 direct TICoy and hold.

D-ATIS	HOUSTON APP CON	HOUSTON TOWER	GND CON	CLNC DEL	CPDLC
124.05	120.05 379.1 EAST 124.35 316.15 WEST	135.15 290.2	118.575	128.1	

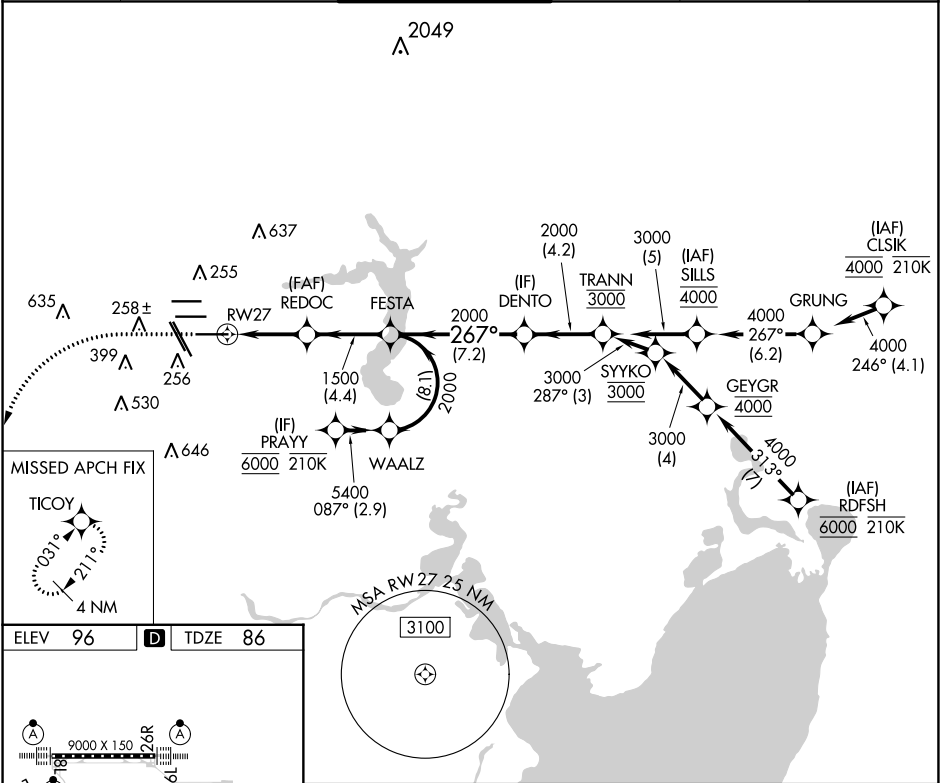

ELEV 96 TDZE 86

TDZ/CL Rwy 8L, 8R, 15R, 26R, 26L, 27 and 33L
HIRL all Rwy

560 3000 TICoy

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.30 DA	380/24	294 (300-1/2)		

AUTHORIZATION REQUIRED