



| | | |
|--|------------------------|---|
| WAAS CH 57919 W13A | APP CRS 129° | Rwy Idg TDZE 3603 Apt Elev 3607 |
|--|------------------------|---|

RNAV (GPS) Y RWY 13
RICK HUSBAND AMARILLO INTL (AMA)

| | | | | | |
|--|---|---|--|-----------------------------------|-------------------------|
| RNP APCH. <div><div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. ASR</div></div> | | | MISSED APPROACH: Climb to 5400 direct PAMPE and on track 105° to CAUDE and hold. | | |
| ATIS 118.85 350.3 | AMARILLO APP CON★ 119.5 307.0 | AMARILLO TOWER★ 118.3(CTAF) 257.9 | GND CON 121.9 348.6 | CLNC DEL 121.65 239.275 | UNICOM 122.95 |

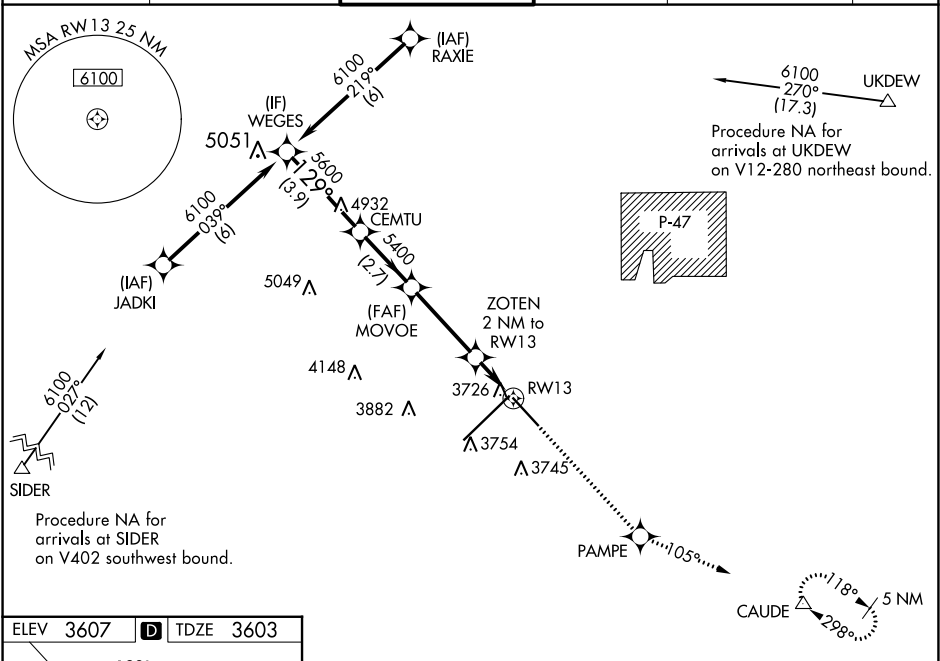

| | | |
|------------------|----------|------------------|
| ELEV 3607 | D | TDZE 3603 |
|------------------|----------|------------------|

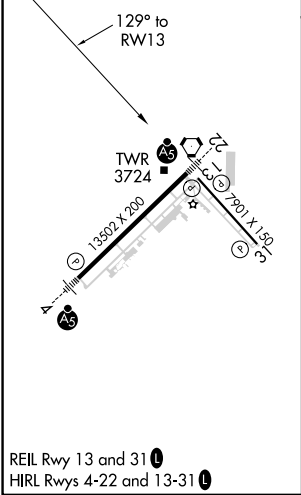

| | | | | | | | | | | | |
|-------------------------|--|--------|--|-------------|--|--------------------------|--|-------------------------|--|-------------------------|--|
| WEGES | | CEMTU | | MOVOE | | ZOTEN 2 NM to RW13 | | PAMPE | | CAUDE | |
| 6100 | | 5600 | | 5400 | | *4280 | | 5400 | | tr 105° | |
| Procedure Turn NA | | | | | | | | *1 NM to RW13 | | *LNAV only. | |
| GP 3.00° TCH 52 | | | | | | | | | | RW13 | |
| | | 3.9 NM | | 2.7 NM | | 3.4 NM | | 1 NM | | 1 NM | |
| CATEGORY | | A | | B | | C | | D | | | |
| LPV DA | | | | 3803-¾ | | 200 (200-¾) | | | | | |
| LNAV/ VNAV DA | | | | 3976-1¼ | | 373 (400-1¼) | | | | | |
| LNAV MDA | | | | 3980-1 | | 377 (400-1) | | | | 3980-1¼ 377 (400-1¼) | |
| CIRCLING | | 4080-1 | | 473 (500-1) | | 4240-1¾ 633 (700-1¼) | | 4280-2¼ 673 (700-2¼) | | | |