RNAV (GPS) RWY 35
PERRY MUNI (F22)

WAAS CH 61140 W35A	APP CRS 354°	Rwy ldg 5103 TDZE 1003 Apt Elev 1003

NA

For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Ponca City altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting and increase all DA 53 feet and all visibility ⅛ SM, increase all MDAs 60 feet and Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct AHOBY and hold.

KANSAS CITY CENTER	UNICOM
127.8 319.1	122.8 (CTAF) L

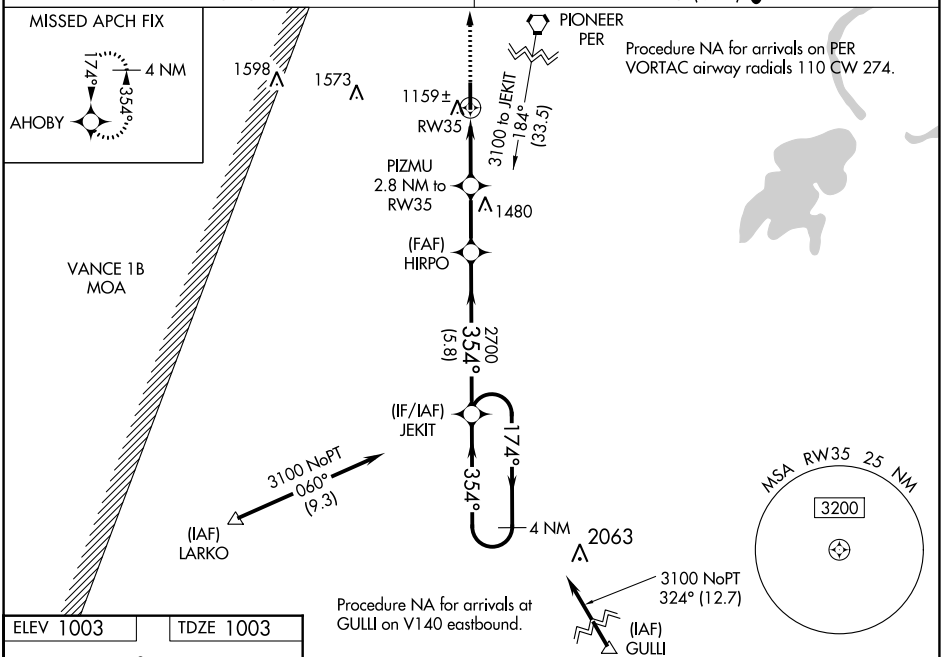

ELEV 1003	TDZE 1003

MIRL Rwy 17-35 L
REIL Rwys 17 and 35 L

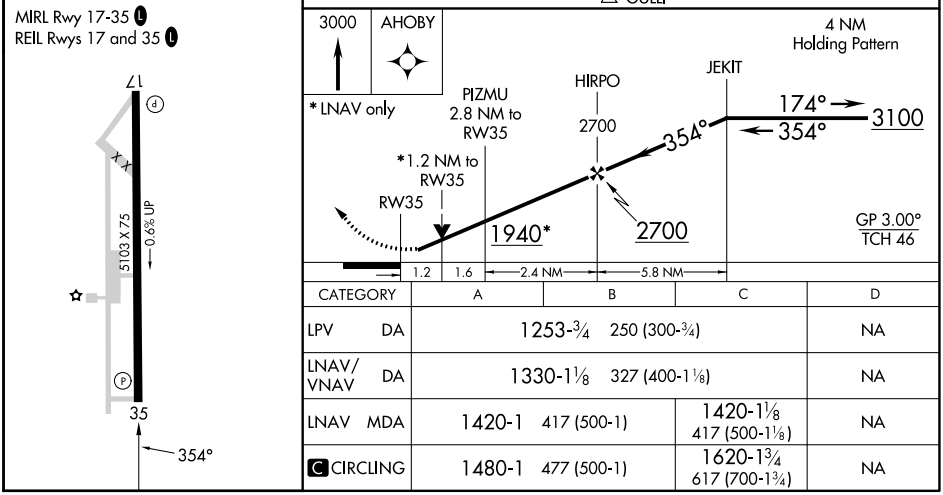

CATEGORY	A	B	C	D
LPV DA	1253-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1330-1⅛ 327 (400-1⅛)			NA
LNAV MDA	1420-1 417 (500-1)		1420-1⅛ 417 (500-1⅛)	NA
C CIRCLING	1480-1 477 (500-1)		1620-1¾ 617 (700-1¾)	NA

SC-1, 13 JUL 2023 to 10 AUG 2023