WAAS

CH 58318


altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Orange altimeter setting and increase all DA to 780 Feet and all MDA 40 feet and increase LPV and LNAV/VNAV visibility 1/8 SM.


494

494

MISSED APPROACH: Climb to 1000 then climbing right turn to 2900 direct GVE VORTAC and hold, continue climb-in-hold to 2900.

AWOS-3 POTOMAC APP CON UNICOM 119,475 132,85 323,125 122,975 (CTAF) (

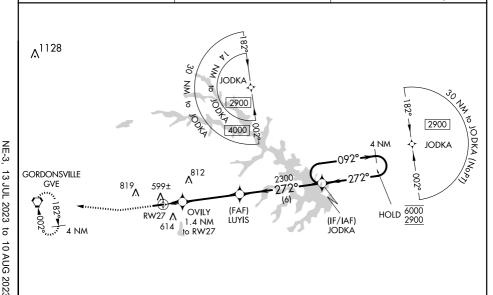

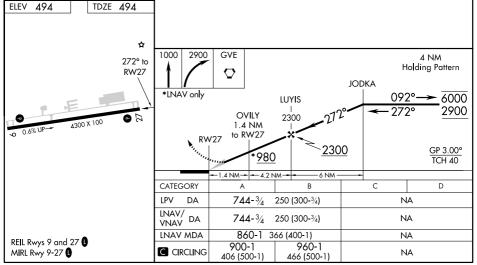

LOUISA, VIRGINIA Amdt 2 15AUG19 LOUISA COUNTY/FREEMAN FLD (LKU)RNAV (GPS) RWY 27