
WAAS 7001 Rwy Idg TDZE APP CRS CH 40007 197° W20A Apt Elev RNP APCH - GPS.


54°C. For inop ALS, increase LNAV Cat C/D visibility to 13/8 SM.

## RNAV (GPS) Y RWY 20 LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

MISSED APPROACH: MAIS Climb to 2000 direct  $oldsymbol{
abla}$  Rwy 20 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above POLIY and on track 109° (A<sub>4</sub>) ---to SAFES and hold.

NEW ORLEANS APP CON D-ATIS **NEW ORLEANS TOWER** GND CON CLNC DEL CPDLC WEST 125.5 350.35 121.9 273.525 127.55 119.5 254.3 120,925 **EAST** 133.15 290.3

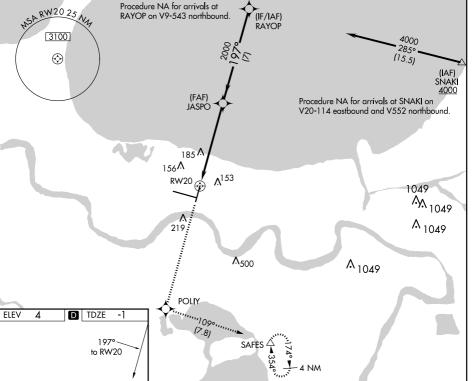

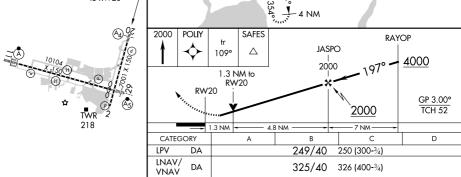

HIRL All Runways NEW ORLEANS, LOUISIANA Amdt 3A 07OCT21

RLLS Rwy 2 TDZ/CL Rwy 11

13 JUL 2023 to 10 AUG 2023

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

460/55

580-11/2

576 (600-11/2)

461 (500-1)

600-2

596 (600-2)

461 (500-3/4)

516 (600-1)

LNAV

**C** CIRCLING

MDA

460/40

520-1