


APP CRS <b>180°</b>	Rwy Idg	<b>3800</b>
	TDZE	<b>437</b>
	Apt Elev	<b>437</b>

RNAV (GPS) RWY 18

ST CHARLES COUNTY RGNL/SMARTT FLD (S'E'T)

<div><div>▽</div><div>▲</div></div> <div>DME/DME RNP-0.3 NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 60 feet; increase visibility Cat C ¼ SM. VDP NA with St Louis Lambert Intl altimeter setting.</div>	MISSED APPROACH: Climbing left turn to 2700 direct FASHE and hold.
---	--

ASOS <b>118.075</b>	ST. LOUIS APP CON <b>124.2 353.9</b>	CLNC DEL <b>121.6</b>	UNICOM <b>122.7 (CTAF)</b> <b>0</b>
------------------------	---	--------------------------	--

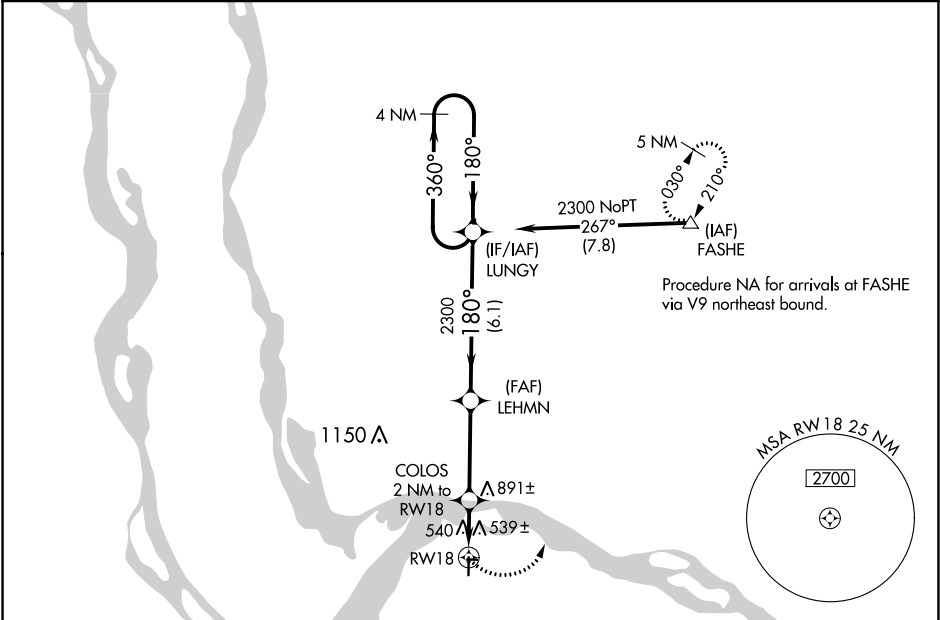

ELEV 437		TDZE 437	
2700 FASHE		VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 40).	
RWY 18		Holding Pattern	
1.1 NM to RWY 18		4 NM	
RWY 18		2300	
1.1 NM		0.9 NM	
1.1 NM		3.6 NM	
1.1 NM		6.1 NM	
CATEGORY	A	B	C
LNNAV MDA	840-1	403 (500-1)	840-1¼ 403 (500-1¼)
CIRCLING	840-1 403 (500-1)	900-1 463 (500-1)	1220-2¼ 783 (800-2¼)