| WAAS CH 40218 W36A | APP CRS 360° | Rwy ldg 5001 TDZE 1003 Apt Elev 1003 |
|---|---|---|

# RNAV (GPS) RWY 36
## CENTRAL KENTUCKY RGNL (RGA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1331 feet, LNAV/VNAV DA to 1345 feet and all MDA 80 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ¼ mile; increase LNAV Cats C and D ⅛ mile and Circling visibility Cat D ¼ mile. Helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Lexington altimeter setting.

MISSED APPROACH: Climb to 3100 direct QEFFO and hold.

| AWOS-3 | LEXINGTON APP CON | UNICOM |
|---|---|---|
| 119.625 | 120.15 259.3 | 122.725 (CTAF) L |

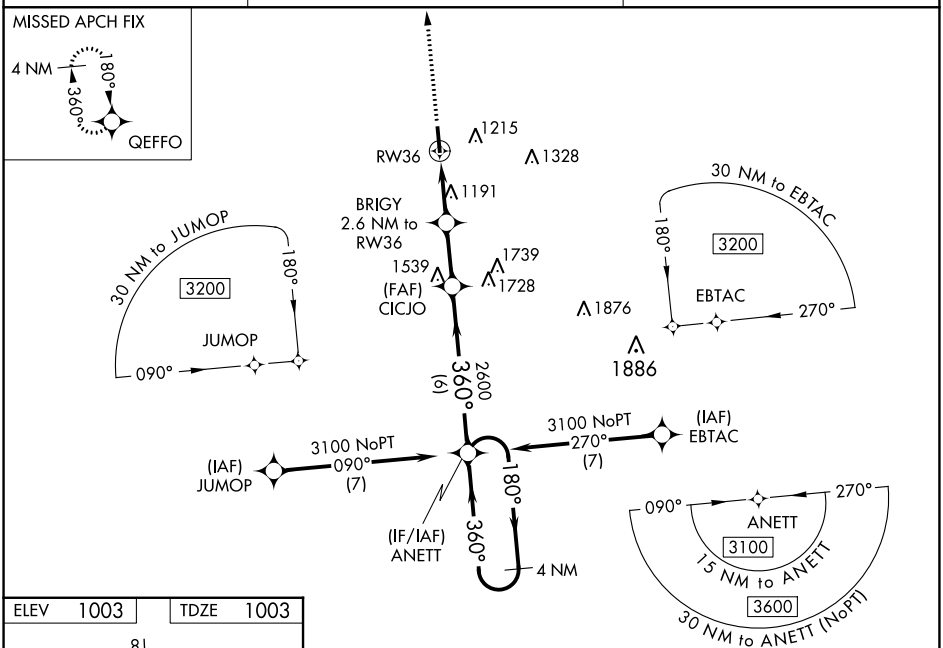


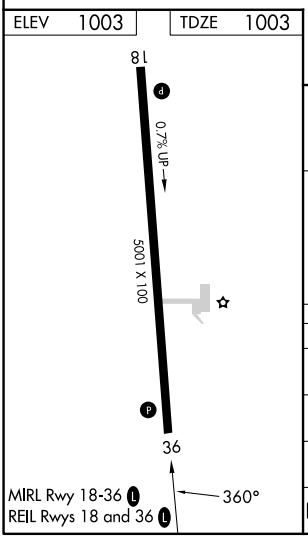


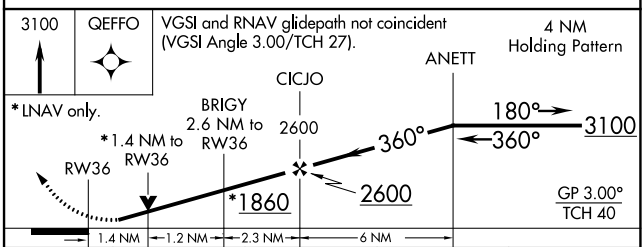


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1264-⅞ 261 (300-⅞) | | | |
| LNAV/VNAV DA | 1278-⅞ 275 (300-⅞) | | | |
| LNAV MDA | 1460-1 457 (500-1) | | 1460-1⅜ 457 (500-1⅜) | |
| C CIRCLING | 1460-1 457 (500-1) | 1520-1 517 (600-1) | 1520-1½ 517 (600-1½) | 1780-2½ 777 (800-2½) |




SE-1, 13 JUL 2023 to 10 AUG 2023