

APP CRS
100°

Rwy Idg
TDZE
Apt Elev

3803
424
424

RNAV (GPS) RWY 10

WILLIAMSON/SODUS (SDC)

RNP APCH - GPS.

Procedure NA at night. Rwy 10 helicopter visibility reduction below 1 SM NA.

When local altimeter setting not received, use Rochester altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ¾ SM, and Circling visibility Cat C ¾ SM.


MISSED APPROACH: Climb to 3100 direct WALCO and hold.

Continue climb-in-hold to 3100.

AWOS-3
124.2

ROCHESTER APP CON
119.55 269.6

UNICOM
122.8 (CTAF) 0

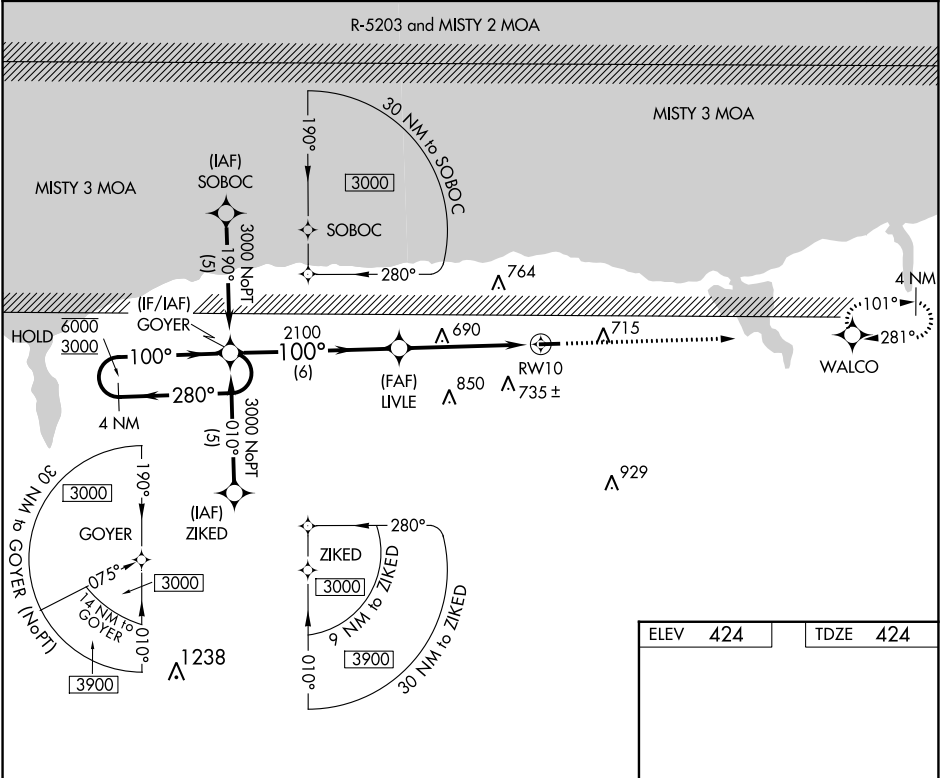

4 NM Holding Pattern

GOYER

6000 3000

280° 100°

LIVLE

2100

3.00° TCH 40

RW10

6 NM 5.1 NM

3100 WALCO

100°

3803 X 60

28

CATEGORY	A	B	C	D
LNAV MDA	940-1	516 (600-1)	940-1 3/8 516 (600-1 3/8)	NA
CIRCLING	1000-1 576 (600-1)	1020-1 596 (600-1)	1120-2 696 (700-2)	NA

MIRL Rwy 10-28 0

REIL Rwy 10 and 28 0