
OLATHE, KANSAS AL-302 (FAA) WAAS 7339 Rwy Idg APP CRS CH 81807 1066 TDŻE 356° **W36A** Apt Elev 1087 DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV Cat D visibility to 11/4 and LPV visibility to 1 all Cats. If local altimeter setting not received, use A Johnson County Exec altimeter setting and increase all DA/MDAs 20 feet. VDP NA with Johnson County Exec altimeter setting. **ASOS** KANSAS CITY APP CON 135.325 118.9 251.075 A 2048


RNAV (GPS) RWY 36 NEW CENTURY AIRCENTER (IXD)

MALSR MISSED APPROACH: Climb to 3100 direct ZODPU and hold. å

NEW CENTURY TOWER ★ UNICOM GND CON 124.3 133.0 (CTAF) (122.95 MISSED APCH FIX 5 NM

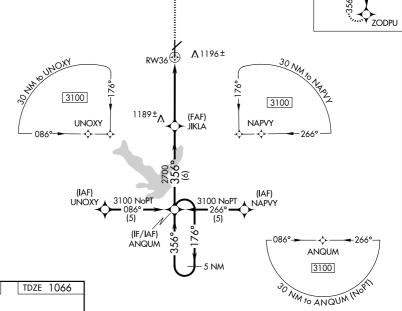

ANOUM



NC-2, 13 JUL 2023 to 10 AUG 2023

ELEV

1087

5 NM Holding Pattern		JIKLA				1	\$
3100	<u>176°</u> 356° →	/	3560		*1.1 N/ RW3	M to	IAV only.
GP 3.00° TCH 50			2700	<u> </u>		RW3	,,,,,,,,
		-	6 NM	3.9 N	M	1.1 NM -	_
CATEGORY	A		В	-	С		D
LPV DA			1316-1/2	250 (300	-1/2)		

LNAV/ DA NA VNAV LNAV MDA 1440-1/2 374 (400-1/2)

1560-1 473 (500-1)

C CIRCLING

HIRL Rwy 18-36 (OLATHE, KANSAS Amdt 2A 30JAN20

MIRL Rwy 4-22 0

38°50′N-94°53′W

1580-11/2

493 (500-11/2)

3100

ZODPU

1440-1

374 (400-1)

1640-2

553 (600-2)