

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 77824 W05A | APP CRS 050° | Rwy Idg TDZE Apt Elev | 6011 468 468 |
|--|------------------------|-----------------------------|---|



RNAV (GPS) RWY 5
JIMMY CARTER RGNL (ACJ)

RNP APCH.

Baro-VNAV NA when using Columbus altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 40°C. Rwy 5 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Columbus altimeter setting and increase LPV DA to 832 feet and visibility ¼ SM, LNAV/VNAV DA to 954 feet and visibility ⅓ SM, increase all MDAs 120 feet and LNAV Cats C/D visibility ⅓ SM, and Circling Cat C visibility ½ SM, Cat D ¼ SM. Circling Rwy 10, 28 NA at night.

MISSED APPROACH:
Climb to 2600 direct
HASER and hold.

| | | | |
|--------------------------|---|---------------------------|---------------------------------|
| AWOS-3 128.375 | ATLANTA APP CON ★ 124.2 323.1 | CLNC DEL 119.95 | UNICOM 122.8 (CTAF) 0 |
|--------------------------|---|---------------------------|---------------------------------|

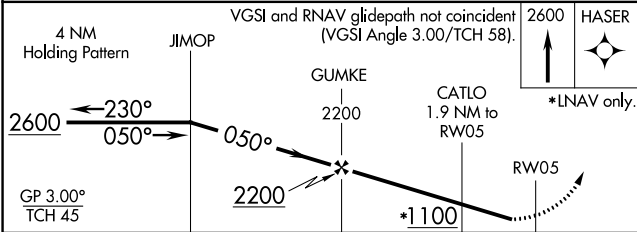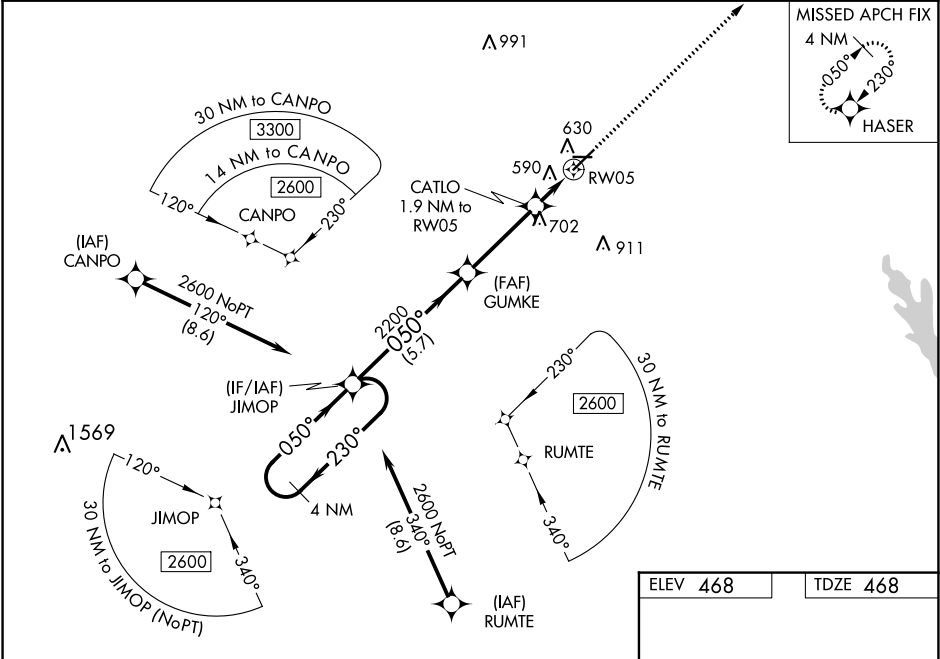

| CATEGORY | A | B | C | D |
|--------------|-------|-------------|-------------------------|-------------------------|
| LPV DA | | 718-1 | 250 (300-1) | |
| LNAV/VNAV DA | | 840-1 | 372 (400-1) | |
| LNAV MDA | | 840-1 | 372 (400-1) | |
| CIRCLING | 940-1 | 472 (500-1) | 1020-1½ 552 (600-1½) | 1280-2¾ 812 (900-2¾) |

