

WAAS  
CH **99518**  
**W17A**

APP CRS  
**175°**

Rwy Idg  
TDZE  
Apt Elev

**6800**  
**699**  
**699**

**RNAV (GPS) RWY 17**

DURANT RGNL/EAKER FLD (DUA)



RNP APCH.

Inop table does not apply to LPV and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat A/B visibility to 1 1/4 SM.

ODALS

MISSED APPROACH: Climb to 2500 direct ZEGRA and hold.

AWOS-3 <b>124.175</b>	FORT WORTH CENTER <b>124.75 323.0</b>	UNICOM <b>123.05 (CTAF) 0</b>
--------------------------	--	----------------------------------

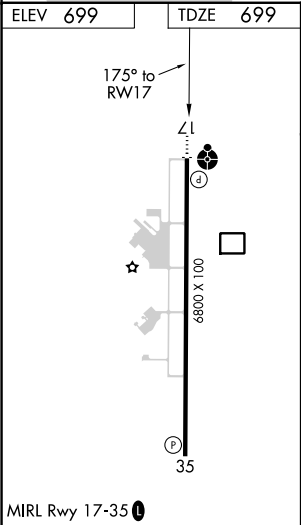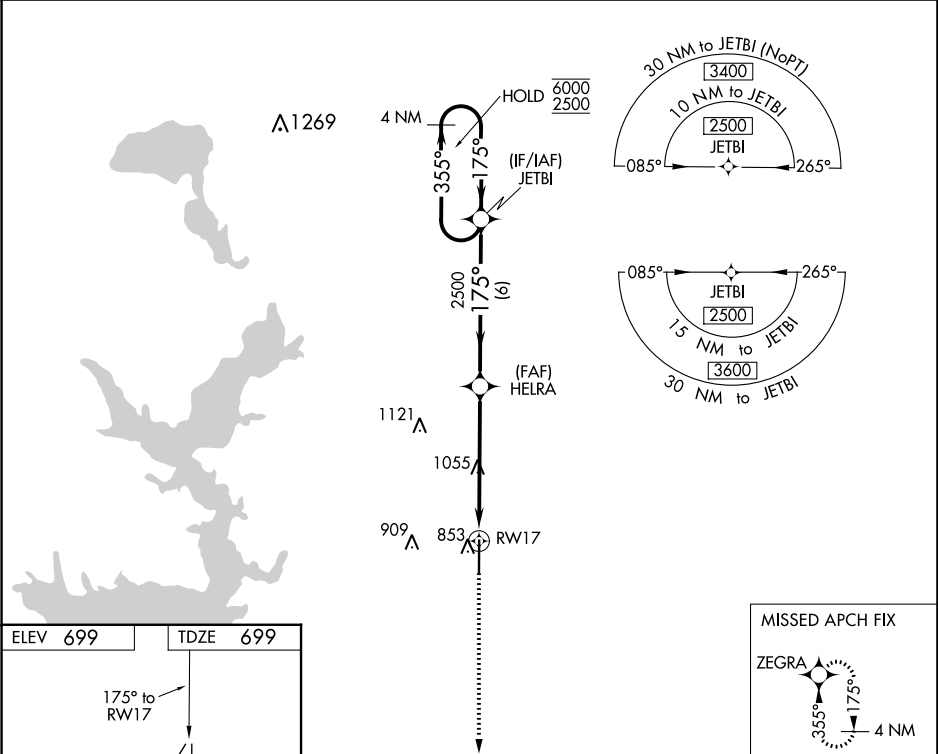

2500	ZEGRA	HELRA	JETBI	4 NM Holding Pattern
*LNAV only.		2500		
	*1.8 NM to RWY 17	175°	355°	6000 2500
	1.8 NM	3.7 NM	6 NM	GP 3.00° TCH 43
CATEGORY	A	B	C	D
LPV DA	899-3/4	200 (200-3/4)		NA
LNAV/VNAV DA	1133-1 1/8	434 (500-1 1/8)		NA
LNAV MDA	1320-3/4	621 (700-3/4)	1320-1 3/4 621 (700-1 3/4)	NA