




WAAS CH 65715 W12B	APP CRS 117°	Rwy Idg 9501 TDZE 3200 Apt Elev 3206
--	------------------------	---

RNAV (GPS) Y RWY 12
MISSOULA MONTANA (MSO)


RNP APCH.

 Circling NA for Cats C and D northeast of Rwy 12-30. Inop
 table does not apply to LNAV # Cats C/D. Inop table does
 -12°C not apply to LPV† all Cats. **RVR 1800 authorized with
 use of FD or AP or HUD to DA.


MALSRS

MISSED APPROACH: (Do not exceed 200K until CINON) Climb to 12000 direct CINON and on track 179° to TUSEE and on track 168° to JENKI and hold, continue climb-in-hold to 12000. ## Missed approach requires minimum climb of 325 feet per NM to 7700.

ATIS 126.65	SPOKANE APP CON ★ 124.9 298.95	MISSOULA TOWER ★ 118.4(CTAF) 0 377.175	GND CON 121.9	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

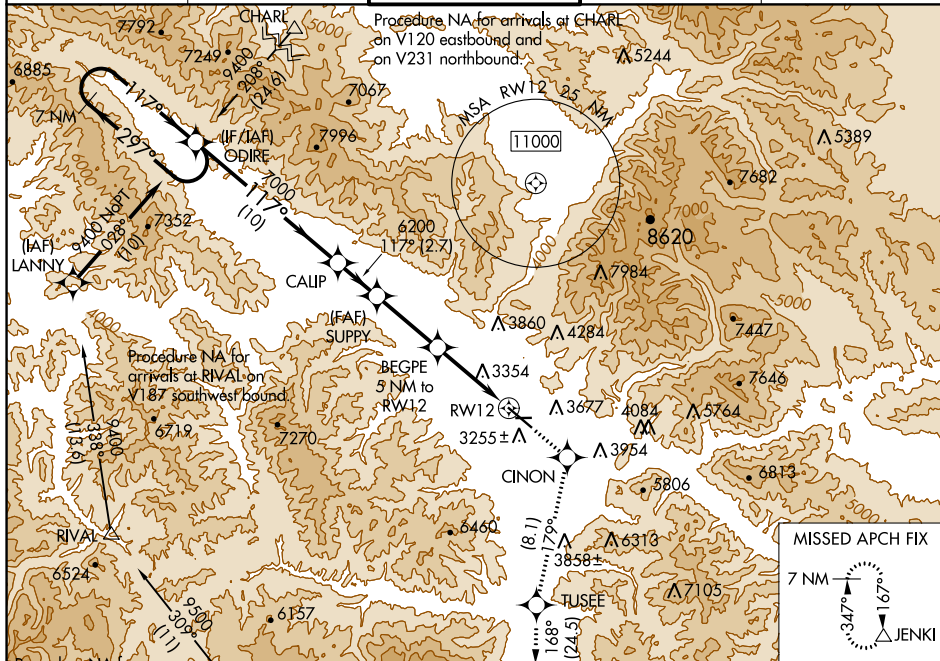

ELEV 3206	D	TDZE 3200
-----------	----------	-----------



7 NM Holding Pattern		ODIRE		CALIP		<div>12000</div> <div>↑</div>		<div>CINON</div> <div>✦</div>		<div>TUSEE</div> <div>tr 179°</div>		<div>tr 168°</div> <div>JENKI</div> <div>△</div>	
9400 ← 297°		117° →		117°		SUPPLY		BEGPE		*LNAV only			
GP 3.00°		TCH 55		7000		6200		5 NM to RW12		*1.2 NM to RW12		RW12	
		10 NM		2.7 NM		4.3 NM		3.8 NM		1.2 NM			
CATEGORY		A		B		C		D					
LPV	DA**	3400/24		200 (200-½)									
LPV	DA†	4229-4		1029 (1100-4)									
LNAV	MDA##	3640/24		440 (500-½)		3640/40		440 (500-¾)					
LNAV	MDA#	4520/40 1320 (1400-¾)		4520/55 1320 (1400-1)		4520-3		1320 (1400-3)					
C	CIRCLING	4520-1¼ 1314 (1400-1¼)		4700-1½ 1494 (1500-½)		4700-3 1494 (1500-3)		5140-3 1934 (2000-3)					

RNAV (GPS) Y RWY 12