
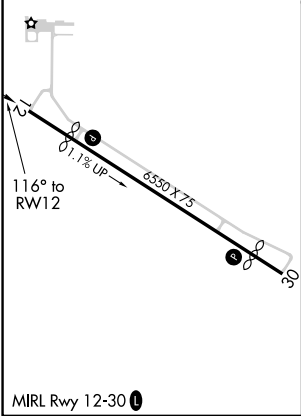


WAAS CH <b>70717</b> <b>W12A</b>	APP CRS <b>116°</b>	Rwy Idg TDZE Apt Elev	<b>5500</b> <b>2114</b> <b>2135</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

WATFORD CITY MUNI (S25)

RNP APCH-GPS.		MISSED APPROACH: Climb to 4300 direct CIPGO and hold.
▼ NA	Rwy 12 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Williston altimeter setting and increase LPV DA to 2474 feet; increase all MDAs 120 feet and RNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.	
AWOS-3PT <b>118.125</b>	SALT LAKE CENTER <b>126.85 305.2</b>	UNICOM <b>122.8 (CTAF) 0</b>

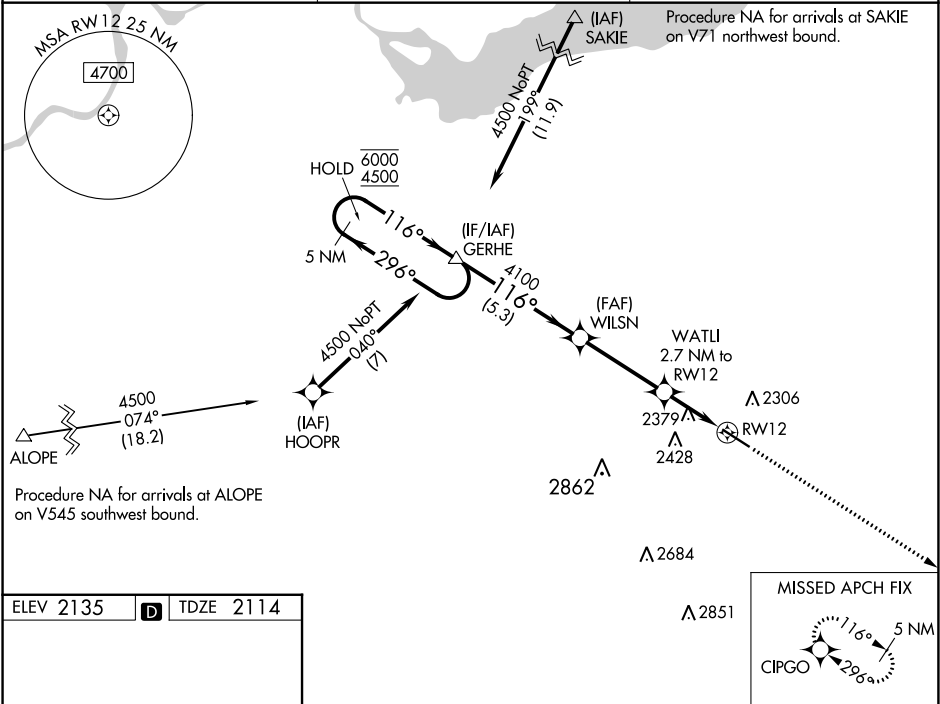

ELEV 2135 D TDZE 2114		MISSED APCH FIX	
5 NM Holding Pattern		GERHE	WILSN
6000 ← 296° 4500 → 116°		4100	WATLI 2.7 NM to RW12
GP 3.00° TCH 40		4100	1.7 NM to RW12
5.3 NM		3.6 NM	1 NM 1.7 NM
CATEGORY	A	B	C
LPV DA	2364-1 250 (300-1)		
LNAV MDA	2640-1	526 (600-1)	2640-1½ 526 (600-1½)
CIRCLING	2700-1 565 (600-1)	2760-1 625 (700-1)	2760-1¾ 825 (700-1¾) 2960-2¾ 825 (900-2¾)