

| | | |
|--|------------------------|---|
| WAAS CH 70705 W05A | APP CRS 051° | Rwy Idg 5002 TDZE 193 Apt Elev 193 |
|--|------------------------|---|

RNAV (GPS) RWY 5
TRI CITIES EXEC/DINWIDDIE COUNTY (PTB)

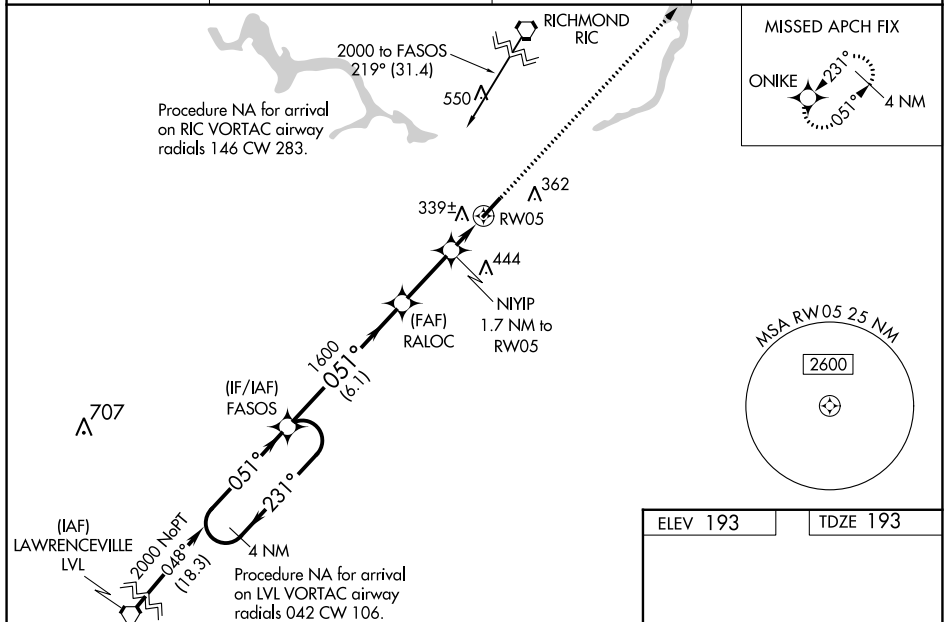
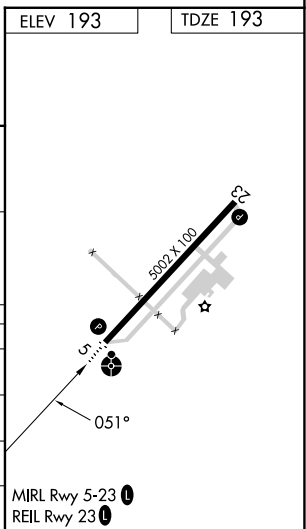
⚠ Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats and LNAV Cat A and B. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Richmond Exec/Chesterfield County altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Richmond Exec/Chesterfield County altimeter setting: increase LPV DA to 534 feet and LNAV/VNAV DA to 546 feet and all MDA 40 feet; increase LNAV Cat C visibility $\frac{1}{8}$ mile and increase Circling Cat C visibility $\frac{1}{4}$ mile. For inop ODALS when using Richmond Exec/Chesterfield County altimeter setting, increase LPV all Cats visibility and LNAV/VNAV all Cats visibility to 1 $\frac{1}{8}$ mile. Inop table does not apply to LNAV Cat A and B when using Richmond Exec/Chesterfield County altimeter setting. For inop ODALS, increase LNAV Cat C visibility to 1 $\frac{1}{8}$ mile.

ODALS



MISSED APPROACH:
Climb to 2000 direct
ONIKE and hold.

| | | | |
|--------------------------|--|-----------------------|---------------------------------|
| AWOS-3 133.325 | POTOMAC APP CON 126.75 307.2 | GCO 135.075 | UNICOM 122.7 (CTAF) ① |
|--------------------------|--|-----------------------|---------------------------------|

[illegible]

RNAV (GPS) RWY 5