

WAAS  
CH **97638**  
**W24A**

APP CRS  
**239°**

Rwy Idg **7003**  
TDZE **237**  
Apt Elev **258**

RNAV (GPS) RWY 24

SHREVEPORT RGNL (SHV)

RNP APCH.

▼

ASR

Rwy 24 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct DOCKK and hold, continue to climb-in-hold to 3000.


ATIS  
**128.45**

SHREVEPORT APP CON  
**119.9 335.55**

SHREVEPORT TOWER  
**121.4 236.775**

GND CON  
**121.175 236.775**

CLNC DEL  
**124.65**

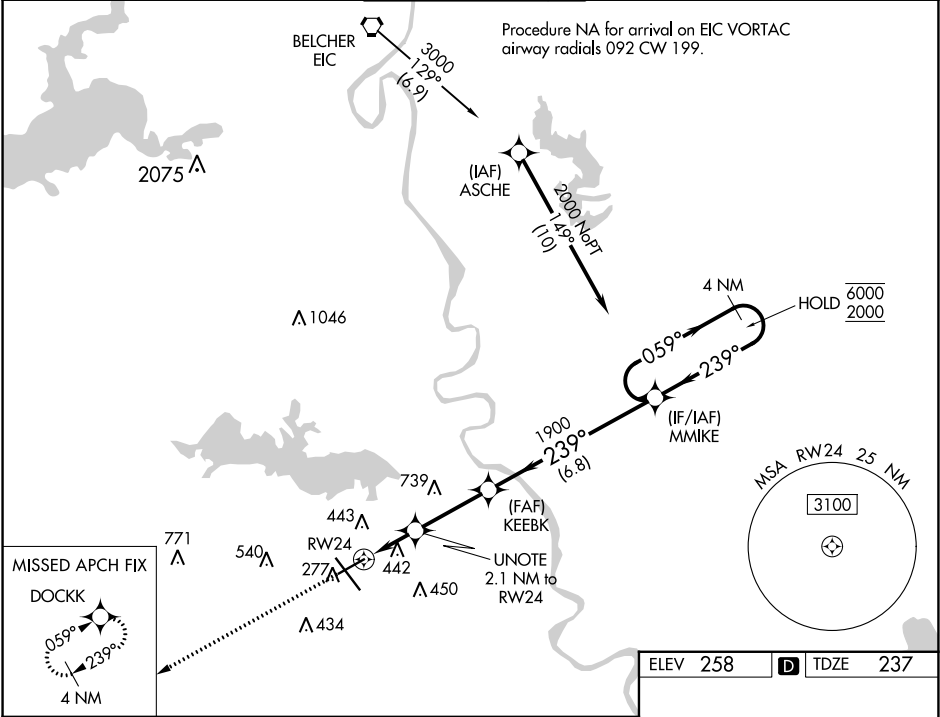

3000 DOCKK

↑

★

\*LNAV only.

RW24

UNOTE 2.1 NM to RW24

KEEBK 1900

MMIKE 4 NM Holding Pattern

GP 3.00° TCH 50

1.3 NM

0.8 NM

3 NM

6.8 NM

CATEGORY	A	B	C	D
LPV DA		487-7/8	250 (300-7/8)	
LNAV/VNAV DA		749-13/4	512 (500-13/4)	
LNAV MDA	700-1	463 (500-1)	700-13/8	463 (500-13/8)
CIRCLING	760-1	502 (600-1)	980-2 722 (800-2)	1100-23/4 842 (900-23/4)

REIL Rwy 6 and 24  
TDZ/CL Rwy 14  
HIRL Rwy 14-32  
MIRL Rwy 6-24