


WAAS CH 86620 W36A	APP CRS 358°	Rwy Idg 5998 TDZE 202 Apt Elev 206
--	------------------------	---

RNAV (GPS) RWY 36
PINEBLUFF RGNL/GRIDER FLD (PBF)


Baro-VNAV NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 42°C. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Stuttgart altimeter setting; increase LPV DA to 527 feet; increase LNAV/VNAV DA to 562 feet and visibility all Cats ½ SM; increase all MDA 80 feet and LNAV and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH:
Climb to 2000 direct PAYIT and hold.

ASOS 120.775	LITTLE ROCK APP CON 119.85 353.6	CLNC DEL 119.85	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------	---------------------------------

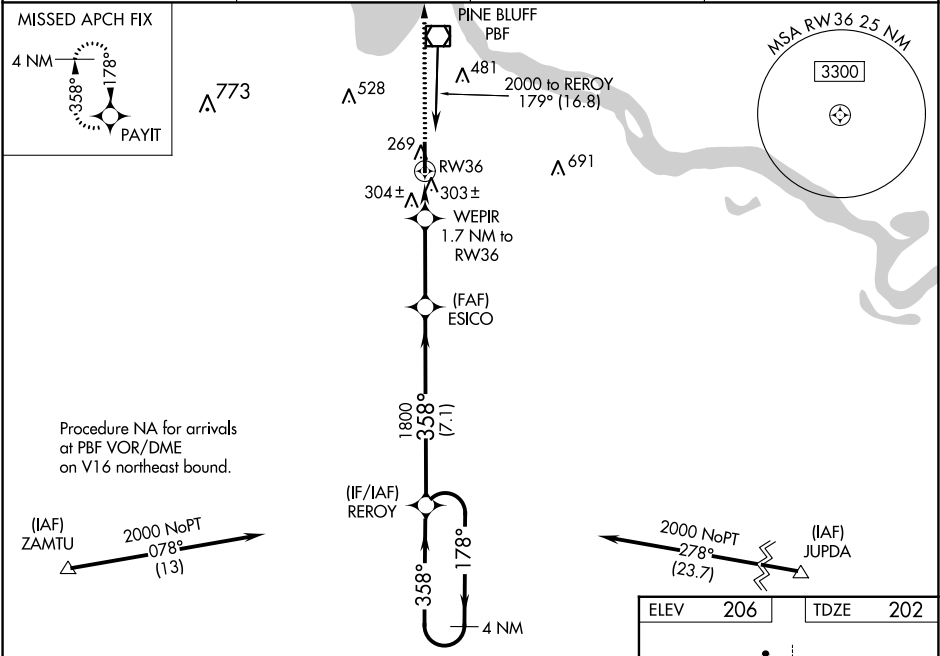

2000	PAYIT	REROY 4 NM Holding Pattern			
*LNAV only.	WEPIR 1.7 NM to RW36	ESICO 1800	1800	178°	2000
RW36		*780	358°	358°	GP 3.00° TCH 52
1.7 NM		3.2 NM	7.1 NM		
CATEGORY	A	B	C	D	
LPV DA	452-1 250 (300-1)				
LNAV/VNAV DA	487-1 285 (300-1)				
LNAV MDA	600-1 398 (400-1)	600-1 398 (400-1 1/8)			
CIRCLING	660-1 454 (500-1)	680-1 474 (500-1)	840-1 634 (700-1 3/4)	880-2 674 (700-2 1/4)	

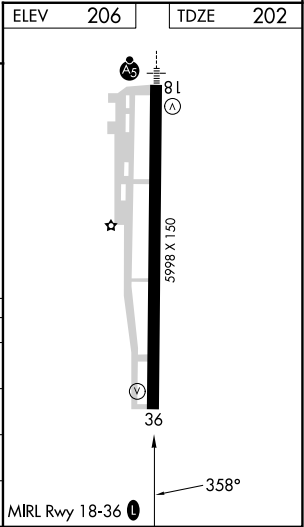

SC-1, 13 JUL 2023 to 10 AUG 2023

SC-1, 13 JUL 2023 to 10 AUG 2023