



WAAS CH <b>65917</b> <b>W25A</b>	APP CRS <b>253°</b>	Rwy Idg TDZE <b>1389</b> Apt Elev <b>1391</b>
----------------------------------------	------------------------	-----------------------------------------------------

RNAV (GPS) RWY 25

BEMIDJI RGNL (BJI)

RNP APCH.	MISSED APPROACH: Climb to 3400 direct TUCTU and on track 178° to CELIS and hold.
<div><div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C.</div></div>	

AWOS-3 <b>119.275</b>	MINNEAPOLIS CENTER <b>134.75 251.1</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	-------------------------------------------	---------------------------------

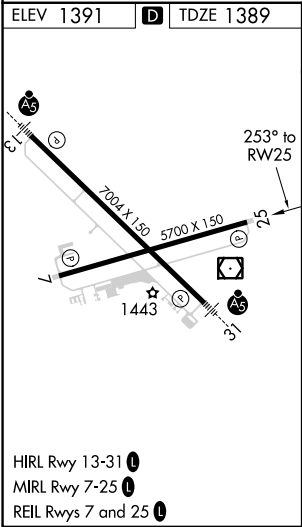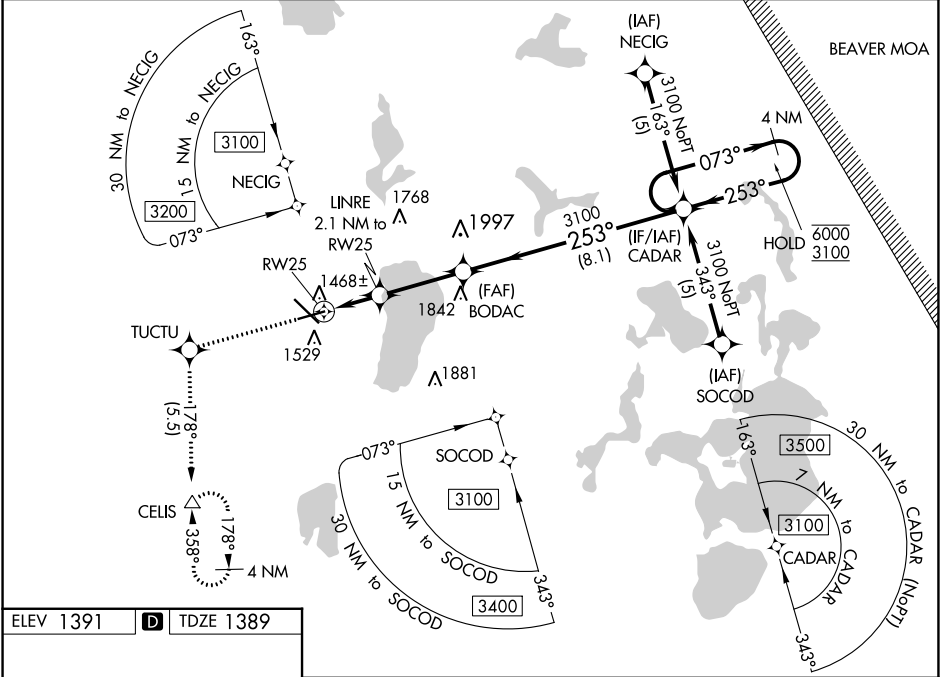

3400	TUCTU	tr 178°	CELIS	BODAC	CADAR	4 NM Holding Pattern
*LNAV only.						
LINRE 2.1 NM to RW25						
*1.3 NM to RW25						
1.3 NM 0.8 3.1 NM 8.1 NM						
CATEGORY	A	B	C	D		
LPV DA	1589-¾		200 (200-¾)			
LNAV/VNAV DA	1752-1¼		363 (400-1¼)			
LNAV MDA	1840-1	451 (500-1)	1840-1½ 451 (500-1½)	1840-1½ 451 (500-1½)		
CIRCLING	1840-1 449 (500-1)	1860-1 469 (500-1)	1860-1½ 469 (500-1½)	1960-2 569 (600-2)		