

WAAS CH <b>86702</b> <b>W16A</b>	APP CRS <b>163°</b>	Rwy ldg TDZE Apt Elev	<b>4601</b> <b>16</b> <b>16</b>
----------------------------------------	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 16

EMMONAK (ENM) (PAEM)


▼

▲

If local altimeter setting not received, use St Mary's altimeter setting and increase all DAs 168 feet and all MDAs 180 feet. VDP NA with St Mary's altimeter setting. DME/DME RNP- 0.3 NA. Baro-VNAV NA when using St Mary's altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (119°F).

MISSED APPROACH: Climb to 1600 direct KAVWI and right turn via 248° track to SOCGO and right turn via 355° track to LIKUQ and hold.

AWOS-3P <b>135.35</b>	ANCHORAGE CENTER <b>124.5</b>	CTAF <b>122.9 0</b>
--------------------------	----------------------------------	------------------------

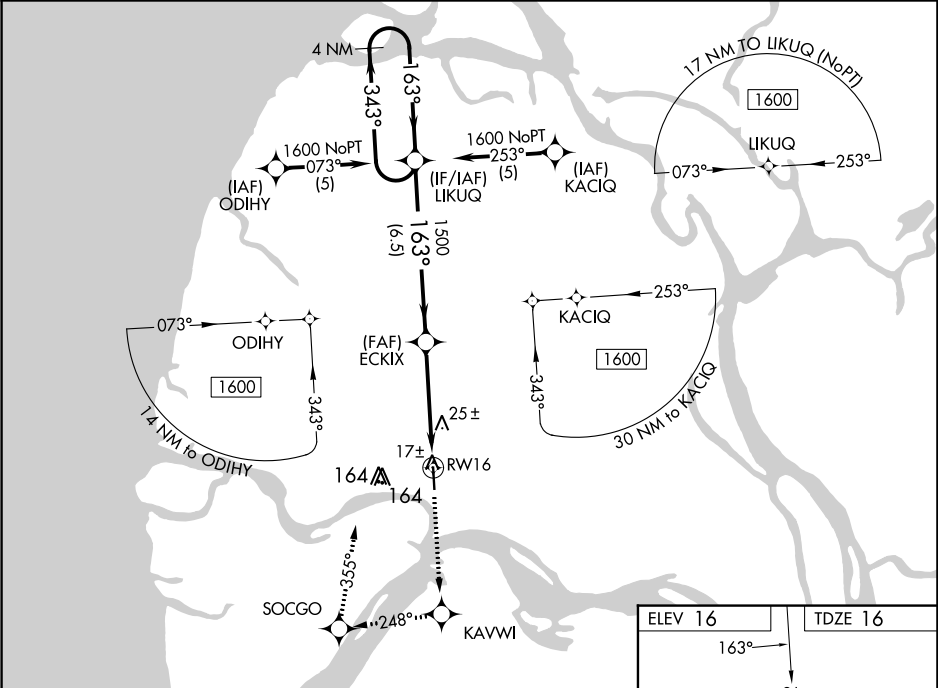

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 32).				1600	KAVWI	SOCGO	LIKUQ
				↑	✦	tr 248°	tr 355°
				* LNAV only			
4 NM Holding Pattern							
1600 ← 343°							
GP 3.00° TCH 35							
				* 0.7 NM to RWY 16			
CATEGORY	A	B	C	D			
LPV DA		266-1	250 (300-1)				
LNAV/ VNAV DA		280-1	264 (300-1)				
LNAV MDA		280-1	264 (300-1)				
CIRCLING	520-1	504 (600-1)	520-1½ 504 (600-1½)	580-2 564 (600-2)			

