NC-1, 13 JUL 2023


to 10 AUG 2023


Rwy ldg 6600 WAAS APP CRS CH 86315 1021 **TDZE** 331° **W33A** Apt Elev 1021

RNAV (GPS) RWY 33

MANKATÓ RGNL (MKT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C For uncompensated Baro-VNAV systems, LNAV, VNAV NA Delow -1, -C, L2-F) or above 40 C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Waseca altimeter setting: increase LPV DA to 1278 feet, LNAV/VNAV DA to 1432 feet and LNAV/VNAV visibility ½ SM all Cats; increase all MDA 60 feet and visibility LNAV Cats C and D½ SM and Circling Cat C½ SM. For inoperative MALSR when using Waseca altimeter setting, increase LPV all Cats visibility to ½ mile and LNAV Cat C and D visibility to ½ mile. Baro-VNAV and VDP NA when using Waseca altimeter setting. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1% mile and LNAV Cats C and D visibility to 1 mile.



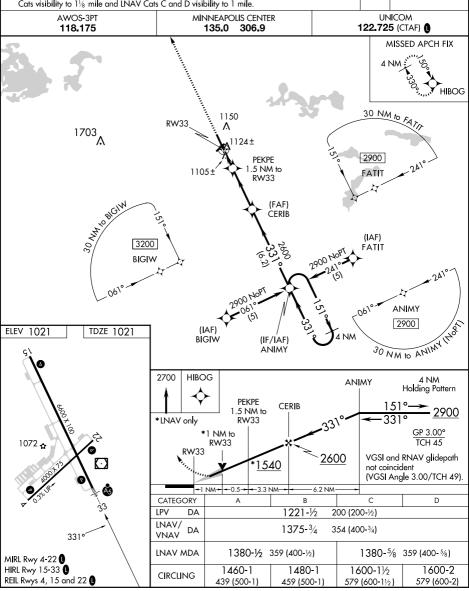

MANKATO, MINNESOTA Orig-B 07OCT21

NC-1, 13 JUL 2023 to

10 AUG 2023

MANKATO RGNL (MKT) RNAV (GPS) RWY 33