

APP CRS  
**238°**

Rwy Idg  
**6010**

TDZE  
**1170**

Apt Elev  
**1175**

RNAV (RNP) Z RWY 24


ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)

RNP AR APCH. RF required.


 For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C.

MISSED APPROACH: Climb to 4000 direct JAYYT and on track 149° to TPUCK and on track 107° to MONAT and hold. # Missed approach requires minimum climb of 217 feet per NM to 3200.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON	CLNC DEL
132.375	126.9 339.8	118.3 257.8	121.9 257.8	119.7

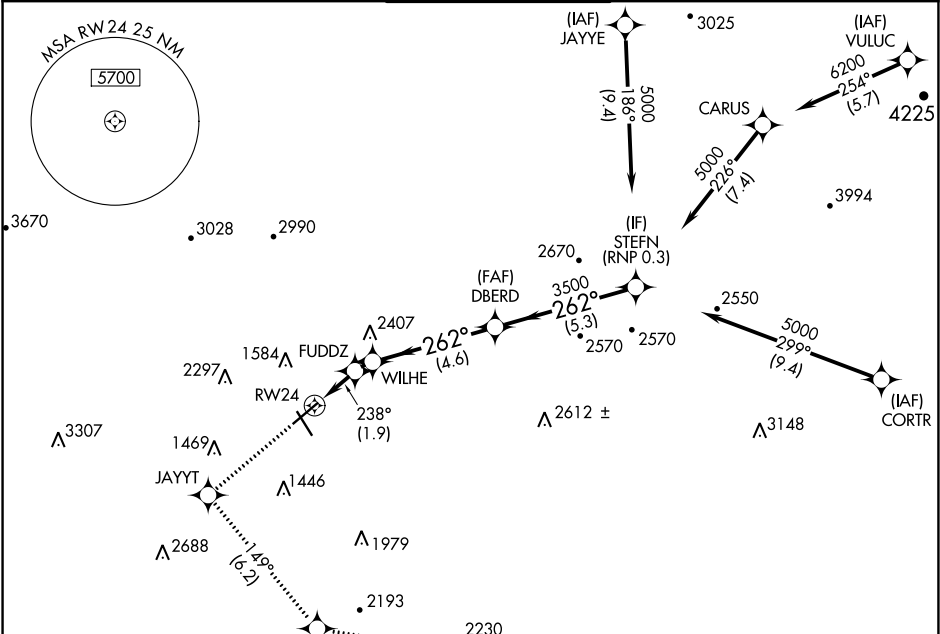

ELEV 1175

 TDZE 1170

238° to RWY24

9L

6800 X 150

TWR 1365

1810 X 150

0-4% UP

REIL Rwy 6 and 24

HIRL Rwy 6-24 and 16-34

4000

JAYYT

tr 149°

TPUCK

tr 107°

MONAT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 58).

DBERD

STEFN

3500

262°

5000

3500

GP 3.00

TCH 55

CATEGORY

A

B

C

D

# RNP 0.15 DA

1491-1

321 (400-1)

RNP 0.30 DA

1579-1½

409 (500-1½)

AUTHORIZATION REQUIRED