

WAAS CH <b>49237</b> <b>W09A</b>	APP CRS <b>095°</b>	Rwy Idg <b>7280</b> TDZE <b>17</b> Apt Elev <b>17</b>
--	------------------------	---

RNAV (GPS) RWY 9

SAN DIEGO INTL (SAN)

RNP APCH.

▼


⚠

Circling NA north of Rwy 9-27. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 6°C or above 47°C. When Circling to Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 9 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cats A/B visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct CAPUS and hold.

D-ATIS <b>134.8</b>	SOCAL APP CON <b>119.6 363.1 (WEST)</b> <b>124.35 279.625 (EAST)</b>	LINDBERGH TOWER <b>118.3 338.225</b>	GND CON <b>123.9</b>	CLNC DEL <b>125.9</b>	CPDLC
------------------------	--	---	-------------------------	--------------------------	-------

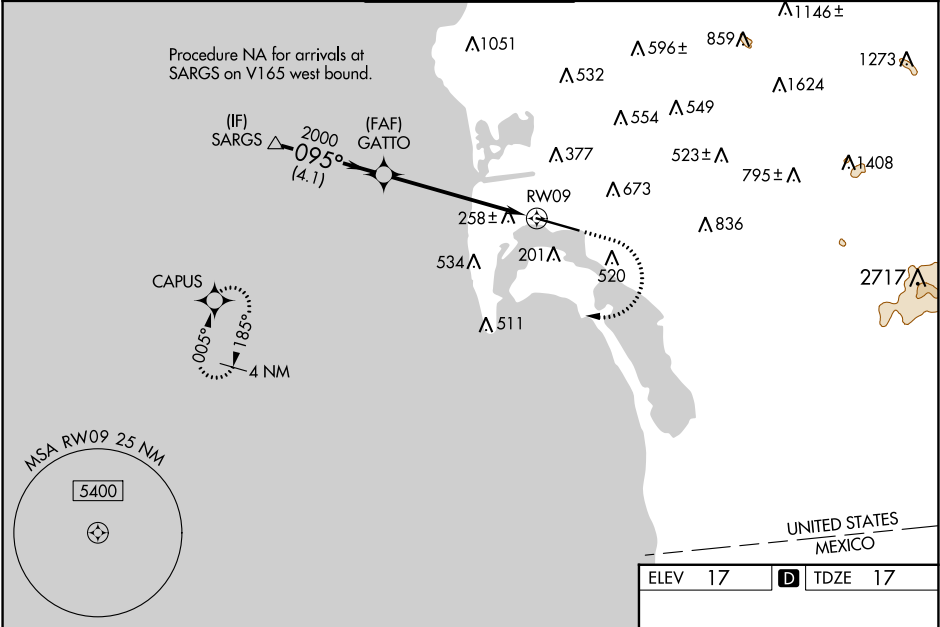

VGSI and RNAV glidepath not coincident (VGSI Angle 3.30/TCH 76).

SARGS

GATTO

2000

2000

2100

095°

GP 3.10° TCH 55

4.1 NM

4.3 NM

1.6 NM

RW09

\*1.6 NM to RW09

\*LNAV only.

CATEGORY	A	B	C	D
LPV DA	262/40		245 (300-¾)	
LNAV/VNAV DA	621-1½		604 (700-1½)	
LNAV MDA	600/40	583 (600-¾)	600-1¼	583 (600-1¼)
CIRCLING	800-1 783 (800-1)	820-1 803 (900-1)	820-2¼ 803 (900-2¼)	940-3 923 (1000-3)

ELEV 17 TDZE 17

095°

TWR 159

9401 X 200

70

AS

A4

TDZ/CL Rwys 9 and 27  
HIRL Rwy 9-27

SW-3, 13 JUL 2023 to 10 AUG 2023

SW-3, 13 JUL 2023 to 10 AUG 2023