

WAAS CH 40420 W18A	APP CRS 178°	Rwy Idg TDZE 206 Apt Elev 206	5998
--	------------------------	---	-------------

RNAV (GPS) RWY 18


PINEBLUFF RGNL/GRIDER FLD (PBF)

⚠ Inop table does not apply to LPV. Baro-VNAV and VDP NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. Rwy 18 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Stuttgart altimeter setting; increase LPV DA to 534 feet; increase LNAV/VNAV DA to 723 feet and visibility all Cats 1/4 SM; increase all MDA 80 feet and LNAV Cats C/D and Circling Cats C/D visibility 1/4 SM. For inop MALSRS increase LNAV Cats A/B visibility to 1 and Cats C/D visibility to 1 1/8. For inop MALSRS when using Stuttgart altimeter setting, increase LPV visibility all Cats 1/4 mile, increase LNAV visibility Cats A/B 1/4 mile and Cats C/D 3/8 mile.

MALSRS

MISSED APPROACH:
Climb to 2000 direct REROY and hold.

ASOS 120.775	LITTLE ROCK APP CON 119.85 353.6	CLNC DEL 119.85	UNICOM (CTAF) 123.0
------------------------	--	---------------------------	----------------------------

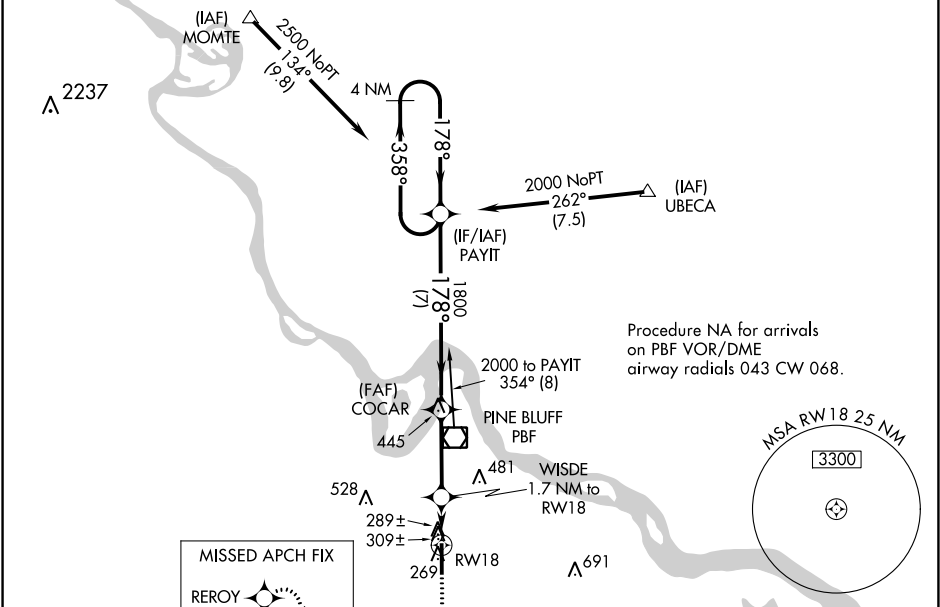

ELEV 206		TDZE 206	
2000		REROY	
*LNAV only.		GP 3.00° TCH 52	
RW18		PAYIT 4 NM Holding Pattern	
WISDE 1.7 NM to RW18		COCAR 1800	
*1.1 NM to RW18		358° 2000	
780*		178°	
1800		178°	
1.1 0.6 3.2 7 NM		CATEGORY	
A		B	
LPV DA		459-3/4 253 (300-3/4)	
LNAV/VNAV DA		648-1 442 (500-1)	
LNAV MDA		600-3/4 394 (400-3/4)	
CIRCLING		660-1 454 (500-1)	
680-1 474 (500-1)		840-1 3/4 634 (700-1 3/4)	
880-2 1/4 674 (700-2 1/4)		MIRL Rwy 18-36	

SC-1, 13 JUL 2023 to 10 AUG 2023

SC-1, 13 JUL 2023 to 10 AUG 2023