
A NA




RNAV (GPS) RWY 35

Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Mason City altimeter setting and increase all DA 67 feet

MISSED APPROACH: Climb to 4000 direct WIBUD and hold, continue climb-in-hold to 4000.

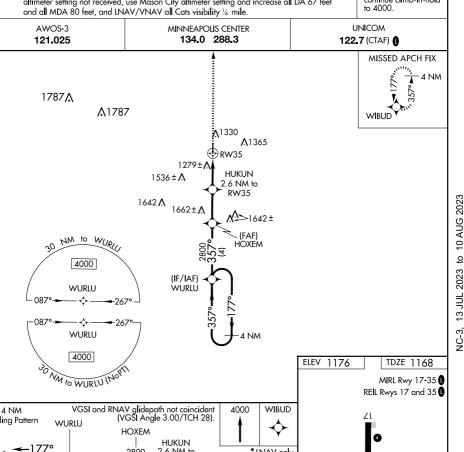

14000	[™] wu 1 77° 357° ->	RLU 35,	HO)	KEM 	HUKUN 6.6 NM to RW35 *1.3 N	VM to /35		NAV only.
GP 3.00° TCH 40		<u>28</u>	00	* <u>20</u>	20	R	W35	, , , , , , , , , , , , , , , , , , ,
		4	NM	 2.4 N	M→ 1.3 NM	1.3 NM	٠	
CATEGORY	_ A	В			С		D	
LPV DA	1418-1 250 (300-1)				NA			
LNAV/ VNAV DA	1654-15/8 486 (500-15/8)				NA			
LNAV MDA	1620-1 452 (500-1)				NA			
CIRCLING	10	340-1	464 (500-	1)		N/	4	



HAMPTON, IOWA Amdt 1A 29MAY14