



WAAS CH 81816 W28A	APP CRS 285°	Rwy Idg TDZE Apt Elev	7610 2858 2872
--	------------------------	-----------------------------	---




RNAV (GPS) RWY 28
MIDLAND INTL AIR AND SPACE PORT (MAF')

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. DME/DME RNP-0.3 NA. Inop table does not apply to LPV all Cats.			MALS 	MISSED APPROACH: Climb to 5000 direct JEMMO and hold.	
ATIS 126.8 235.975	MIDLAND APP CON * 124.6 290.4	MIDLAND TOWER * 118.7 (CTAF) 0273.45	GND CON 121.9 348.6	CLNC DEL 118.05 317.65	UNICOM 122.95

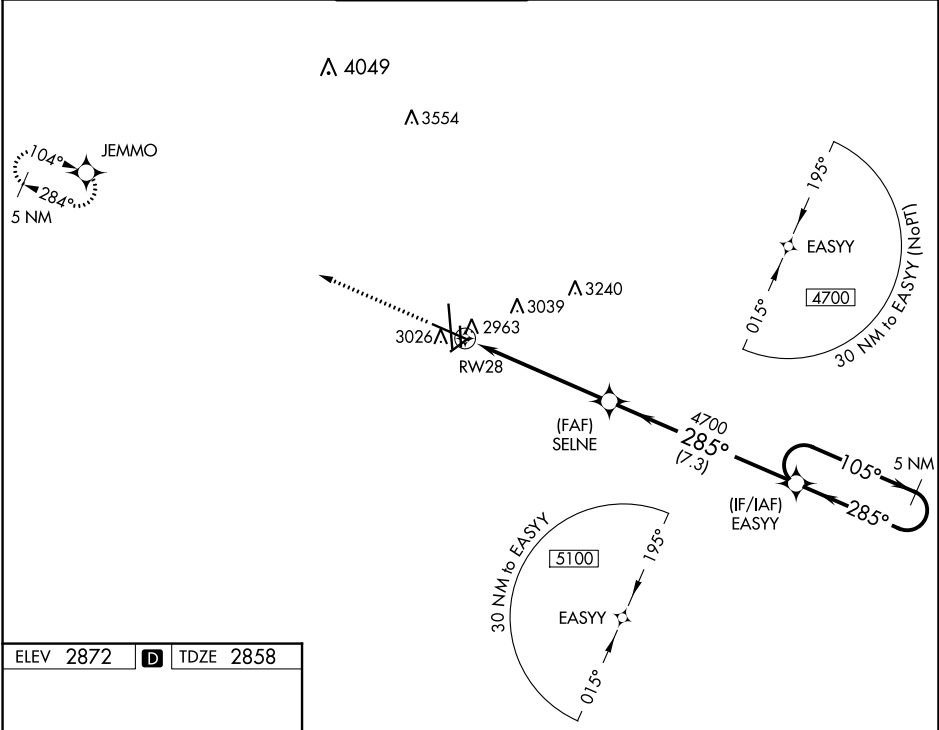

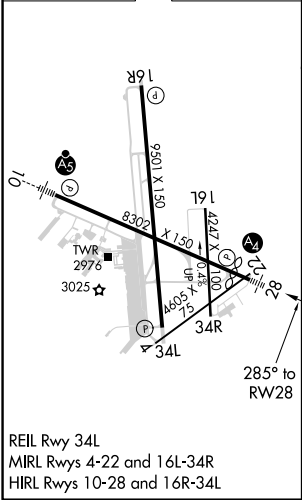ELEV 2872	D	TDZE 2858
-----------	----------	-----------

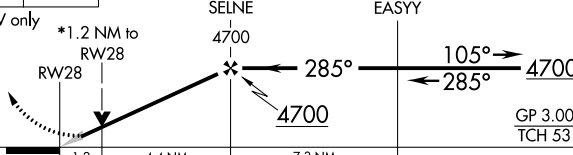

5000		JEMMO		5 NM Holding Pattern	
					
*LNAV only					
CATEGORY		A	B	C	D
LPV DA	3058- ³ / ₄		200 (200- ³ / ₄)		
LNAV/VNAV DA	3271-1 ¹ / ₈		413 (500-1 ¹ / ₈)		
LNAV MDA	3280- ³ / ₄ 422 (500- ³ / ₄)		3280-1 422 (500-1)		
CIRCLING	3440-1 568 (600-1)		3440-1 ¹ / ₂ 568 (600-1 ¹ / ₂)		3520-2 648 (700-2)