

APP CRS 301°	Rwy Idg 7504 TDZE 405 Apt Elev 410
------------------------	---

RNAV (RNP) Z RWY 30
TRI-CITIES (PSC)


T For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 54°C (130°F). RF required. GPS required. For inoperative ODALS, increase RNP 0.11 visibility all Cats to 1½ mile, and increase RNP 0.30 visibility all Cats to 1¾ mile.

ODALS



MISSED APPROACH: Climb to 5200 on track 301° to WEDAV, left turn to YOCUY, and on track 254° to PAIDS and hold.

ATIS 125.65	SPOKANE APP CON ★ 128.75 377.2	TRI-CITIES TOWER ★ 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
----------------	-----------------------------------	--	------------------	-------------------	------------------

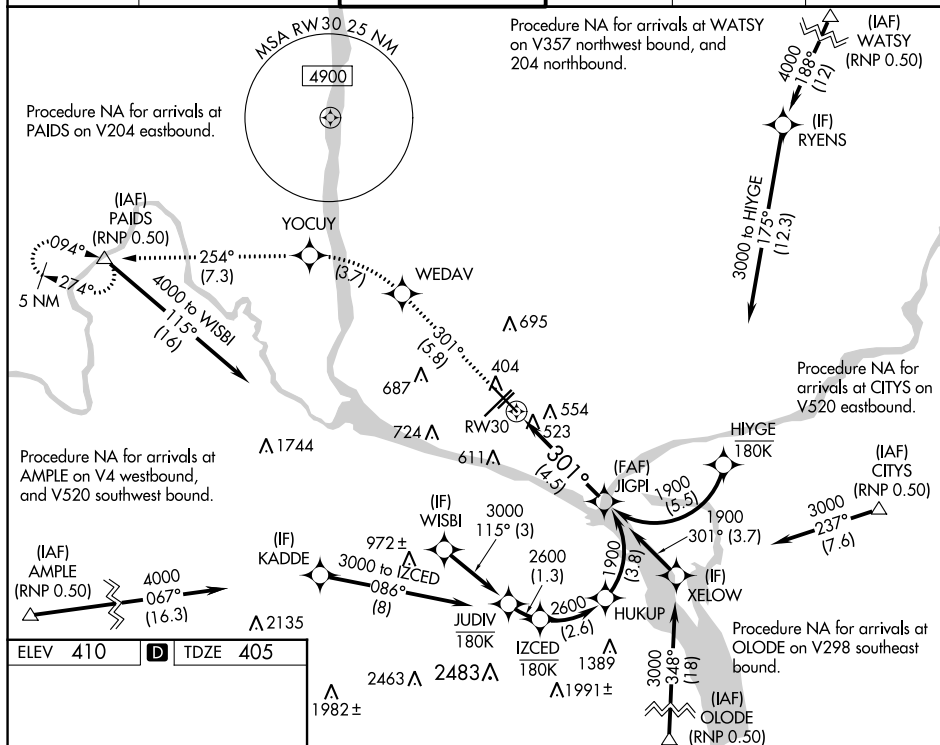

See planview for multiple IF locations.

5200 ↑ tr 301°	WEDAV	YOCUY	tr 254°	PAIDS △
----------------------	-------	-------	---------	------------

JIGPI 1900

RW30

301°

4.5 NM

GP 3.00°
TCH 54

CATEGORY	A	B	C	D
RNP 0.11 DA	778-1 1/8 373 (400-1 1/8)			
RNP 0.30 DA	834-1 1/4 429 (500-1 1/4)			

AUTHORIZATION REQUIRED

RNAV (RNP) Z RWY 30